

MCA(B)-600 Series

600W Outdoor Driver

PRODUCT FEATURE

- Input voltage range: 90~305 Vac;
- Constant power design, outputs programmable;
- Adjustable output current by software
- Multiple dimming capability (P types): 0/1~10Vdc / PWM / Step time dimming;
- Dim to Off
- Surge protection: 5KV line-line, 10KV line-earth;
- Protections: SCP / OVP / OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty

Notes : MCA-600 is Class I type, MCB-600 is Class II type

APPLICATION

Street Lighting, architecture lighting, industrial lighting, flood lighting, etc.

Project Name:	
Type:	



WARRANTY

- See [Limited Warranty Policy](#) for more additional information

MODEL ENCODING

M C A - 600 - 060 XY
① ② ③ ④ ⑤ ⑥

SERIAL NUMBER	ITEM	DEFINITION
①	Structure	M: Metal case P: Plastic case O: Open frame (It can add module power supply, iron shell power supply, and etc.)
②	Type	C: Constant current V: Constant voltage P: Constant current & constant voltage (Other specifications can be defined later, such as I: Industrial power supply, R: Rainproof power supply, S: Customized power supply, etc.)
③	Series Name	A: Class I B: Class II
④	Rated Wattage	3 to 4 digits (such as 600 means 600W)
⑤	Output Voltage	Maximum voltage
⑥	Dimming	X (N): No dimming, D : Wire dimming: 0/1-10V/ PWM, P : Programmable with wire dimming and time step dimming, Y (Y=0-12v auxiliary power supply)

DIMMING	FUNCTION	NOTES
P	Programmable with wire dimming and time step dimming	In stock
P12	Programmable with wire dimming and time step dimming, 12v auxiliary power supply	In stock
N	No dimming and programmable function	

MCA(B)-600 Series

600W Outdoor Driver

SPECIFICATION				
MODEL		060	152	545
MCA(B)-600-XXXN				
INPUT	Efficiency (230Vac)(Typ.)	94.5%	94.5%	95%
	Voltage Range (V)	90~305VAC, or 127 ~ 430VDC		
	Rated Voltage (V)	100~277VAC		
	Frequency Range (Hz)	47~63		
	Power Factor	PF>0.97/120VAC, PF>0.95/230VAC, PF>0.90/277VAC at full load		
	THD	THD<15% when output loading≥50% (Take refer to THD vs. Load Curve for details)		
	AC Current (Max.)	6A MAX at 120Vac, 3.5A MAX at 230Vac		
	Inrush Current (Max.)	COLD START 75A (twidth=400μs measured at 50% Ipeak) at 230VAC, Per NEMA410		
	Leakage Current (Max.)	0.75mA at 277Vac/60Hz		
	MAX. No. of PSUs on 16A Circuit Breaker	2 units (circuit breaker of type B) / 3 units breaker of type C) at 230VAC		
	No Load/ Standby Power Consumption	No load power consumption <10W/ Standby Power Consumption<0.5W		
OUTPUT	Rated Output Voltage (V)	48 – 60	114 – 152	214 – 545
	Output Voltage Range (V)	24 – 60	61 – 152	428.7 – 545
	Rated Current (A)	10 – 12.5	3.95 – 5.25	1.1 – 1.4
	Rated Power (W)	600	600	600
	Output Current Setting Range/ Dimming Range (A)	1.25 – 12.5	0.52 – 5.25	0.14 – 1.4
	Constant Power Setting Range (A)	10 – 12.5	3.95 – 4.9	1.1 – 1.4
	Ripple Current (Typ.)	5% of Io_max. ((PK-AV) /AV) with LED loading mode and full load.)		
	Current Tolerance	<5%		
	Line Regulation	<3%		
	Load Regulation	<3%		
	Setup Time	<1s, at 120Vac; <0.5s, at 230Vac		
	DC AUX Power (P12 Type)	12V; Output Voltage Tolerance: ±10%; Max Output Power: 3.6W		
	Dim to Off	280uA – 450uA		
	DIM+ Short/ Source Current	150uA~350uA		
PROTECTION	Short Circuit Protect (SCP)	Hiccup mode, recover automatically with short circuit removed.		
	Over Voltage Protect (OVP)	Voltage limiting. Output current is decreased if the required loading voltage is higher than MAX. output voltage.		
	Over Temperature Protect (OTP)	Decrease the output current, but not less than 20% of rated output current, recover automatically once the fault condition is removed.		
ENVIRONMENTAL	Working Temperature	-40~+60°C(Refer to 'Derating Curve')		
	Max. Case Temperature (Tc)	90°C max		
	Working Humidity	20~95%RH		
	Storage Temp., Humidity	-40 ~ +85°C, 10 - 95%RH		
	Vibration	10-500Hz, 5G 12min/cycle, period for 72min each along X、Y、Z axes		

MCA(B)-600 Series

600W Outdoor Driver

SAFETY & EMC	Safety Standard	UL8750, CSA C22.2 No. 250.13-12; ENEC EN61347-1, EN61347-2-13 independent, EN62384; GB19510.1, GB19510.14
	Withstand Voltage	I/P-O/P: 3.75kVac, I/P-FG: 1.75kVac, O/P-FG: 1.5kVac
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms (500VDC / 25°C / 70% RH)
	EMC Emission	FCC Part 15 Class B / EN55015, EN61000-3-2 Class C, EN61000-3-3
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11, EN61547 (Surge: L-N: ±5kV, L-N-FG: ±10kV)
OTHERS	MTBF	200000Hrs @25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F)
	Lifetime	50000Hrs@80°C case temperature (Refer to 'Lifetime Curve')
	Dimension	247 x 142 x 48.5mm (L x W x H)
	Weight (Typ.)	3000 ± 200g/ PCS
RELIABILITY	Screen test ⁽¹⁾	336Hrs aging test @95°C & full load without temperature protection


Notes:

1. The test results are based on 14 samples with OTP moved
2. All the data are measured under room temperature if not specified.

OPERATING AREA I-V


MCA(B)-600-060XY

Output Voltage vs. Output Current

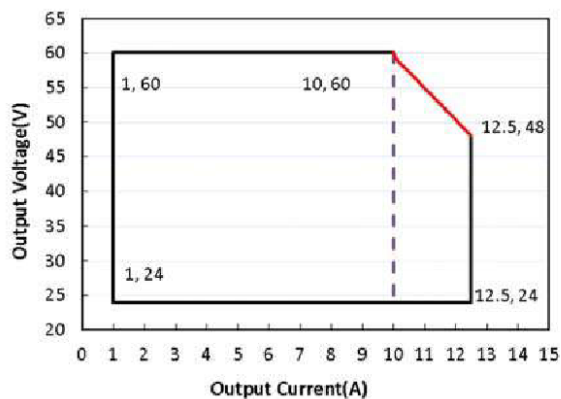


MCA(B)-600-152XY

Output Voltage vs. Output Current

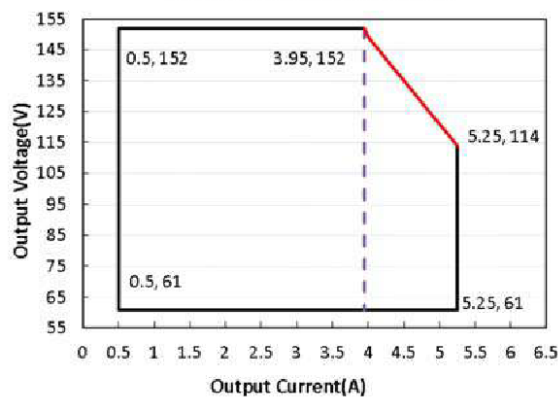

MCA(B)-600-545XY

Output Voltage vs. Output Current

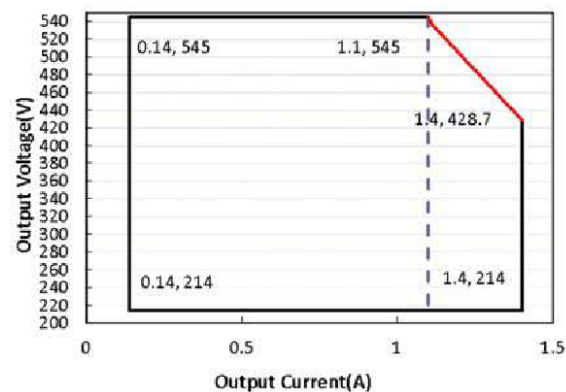


Notes: X=N is suitable for the right area of the dotted line;
X=P is suitable for the solid line contain area.

MCA(B)-600 Series


600W Outdoor Driver

Project Name:	
Type:	


INRUSH CURRENT WAVEFORM

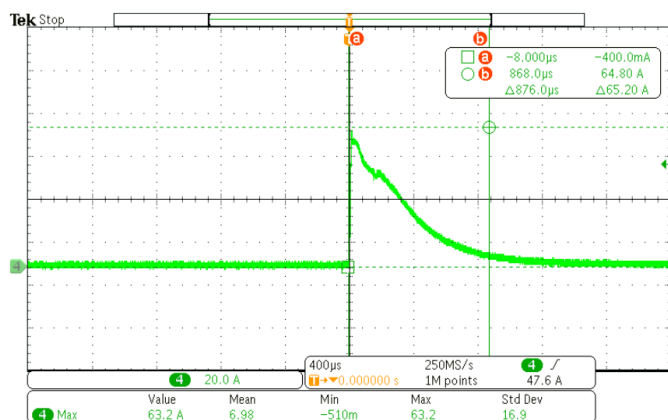


DERATING CURVE

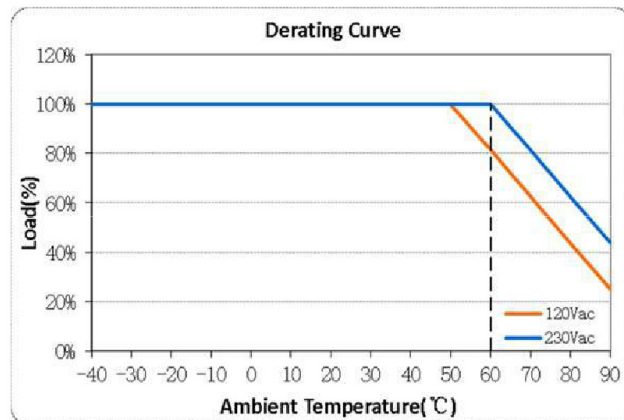

OUTPUT POWER VS INPUT VOLTAGE

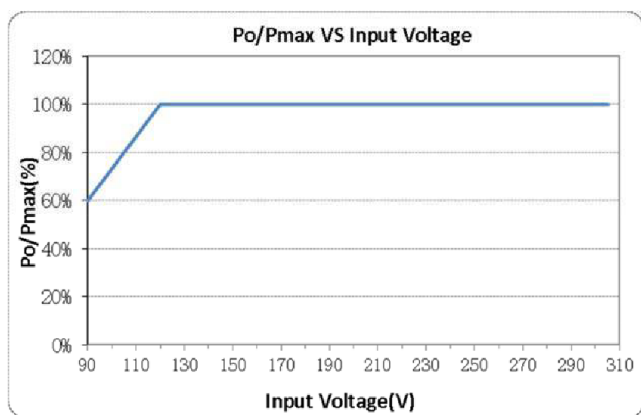

LIFETIME VS CASE TEMPERATURE

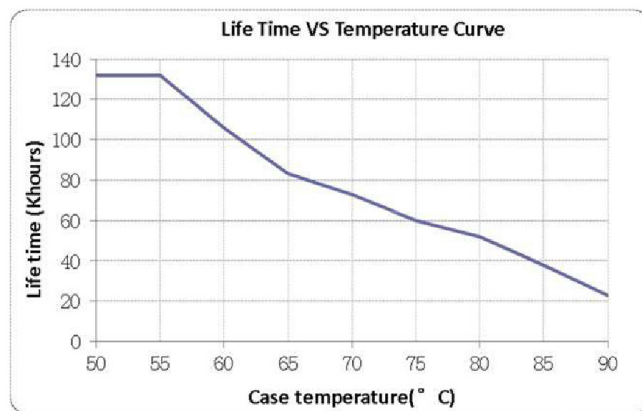


MCA(B)-600 Series

600W Outdoor Driver


MCA(B)-600-060XY (U_o=48V)

Efficiency VS Load

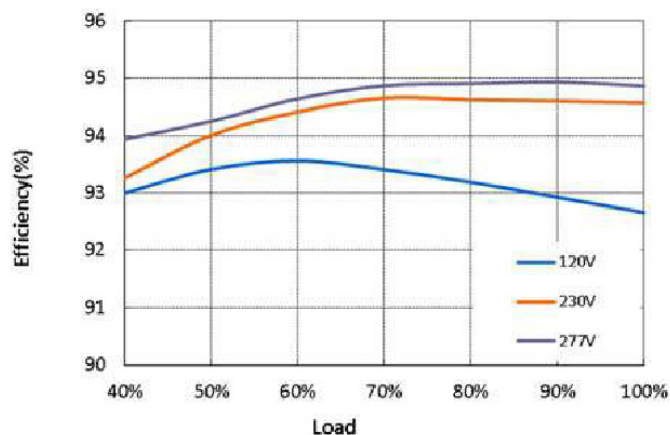


MCA(B)-600-152XY (U_o=122V)

Efficiency VS Load

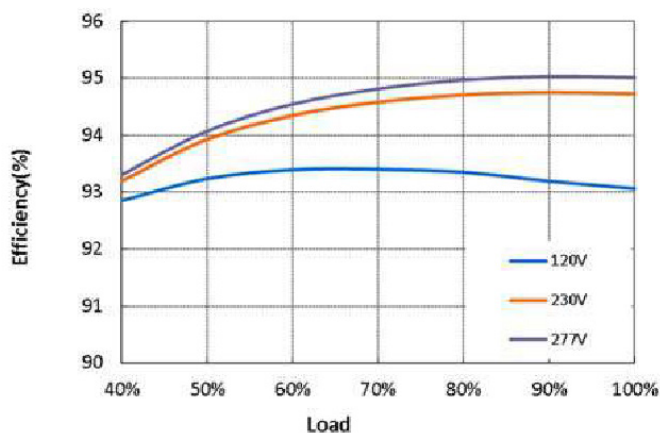


MCA(B)-600-060XY (I_o=428.7V)

Efficiency VS Load

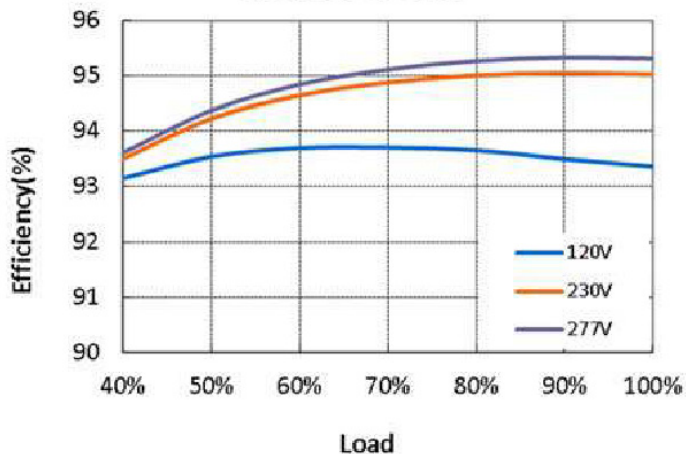

POWER FACTOR VS LOAD


PF VS Load

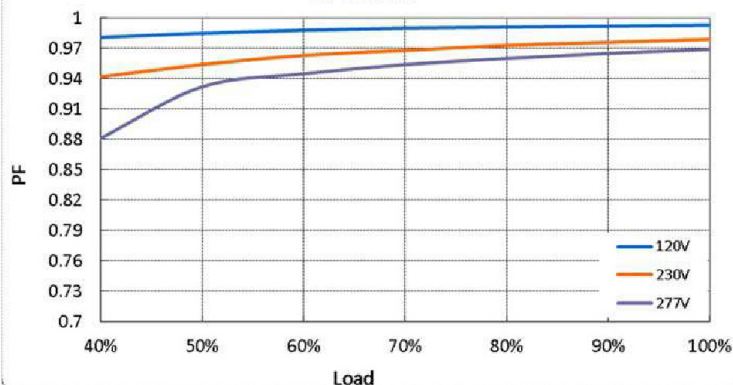

MCA(B)-600 Series

600W Outdoor Driver


TOTAL HARMONIC DISTORTION

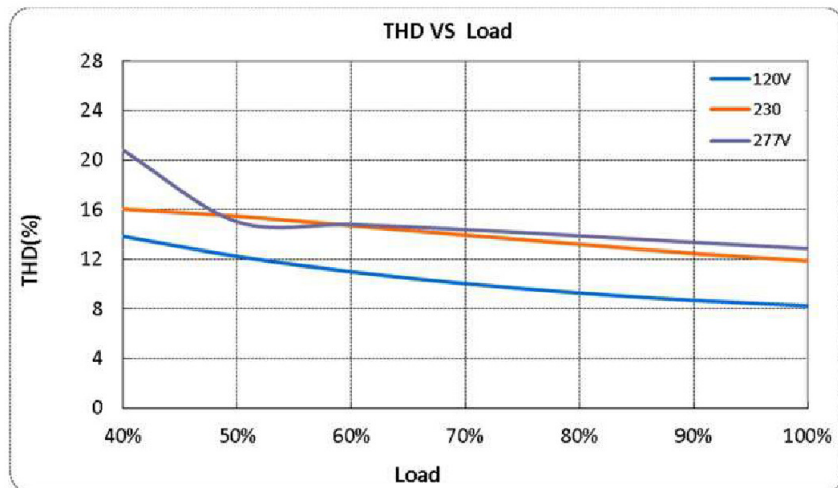

INSTRUCTION

1. Field Programmable Topology.

The programmable driver can be programmed by using special PC software and the programmer module.

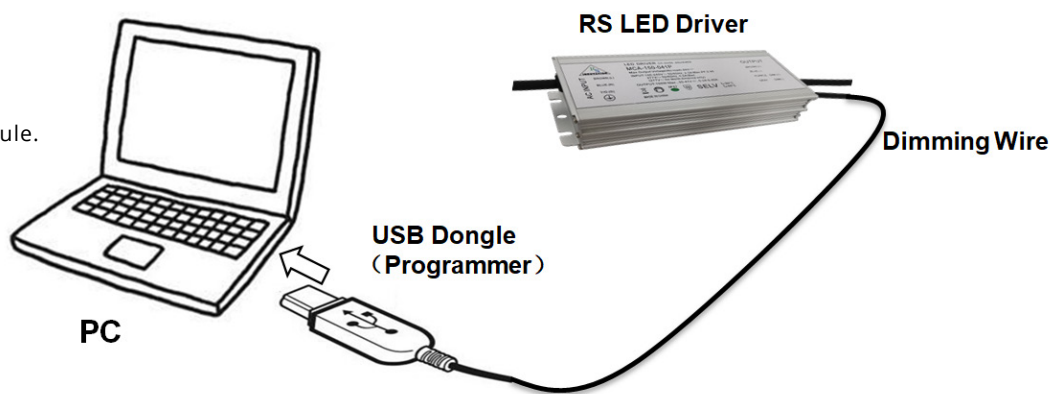

Dimming Interface Description

Pin description

PIN	NAME	VALUE	DESCRIPTION	COLORS
1	Vaux 12V+	10.8V-13.2V	Auxiliary DC power supply	WHT
2	Vaux 12V-	0V	Auxiliary DC power supply GND	BLK
3	Dim+/Prog+	0-10V	Dimming/ Programming input	PURPLE
4	Dim-/Com	0V	Common terminal of Dim/Prog./Aux	GRAY

MCA(B)-600 Series

600W Outdoor Driver

3. Dimming Software Function Instruction


• Communication Setup



Connect Status: **Disconnected**

Click "Connect" to set up the link between the computer and the USB dongle.


• Driver Identification



Read P/N: **MCA-600-080P**

Click "Read" to identify the driver, then fill in the part number and max current automatically.

• Adjustable Output Current (AOC)



☒ Adjustable Output Current

I. Max(spec) **12.5** A I. Set **12.5** A

Click ON "☒" to activate the output current configuration, I. Max(Spec) is filled in automatically during identify driver, I. Set can be filled in any value lower than I. Max(spec).

• Dimming Selection and Setting




☒ Dimming Selection and Setting

☒ Cable Dimming ☐ Time Dimming ☐ No Dimming

Click ON "☒" to activate the dimming selection and setting, or else no update during current setting. Choose one of the control method listed below to go with, then the related setting interface will appear.

• Turn-Off signal setting

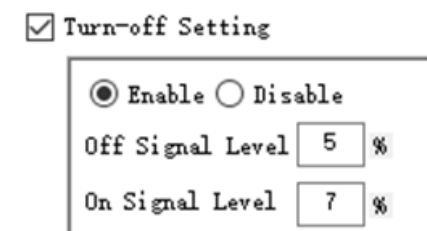

☒ Turn-off Setting


☒ Enable ☐ Disable

Off Signal Level **5** %

On Signal Level **7** %

Click ON "☒" to activate the turn-off function configuration. Choose "enable" or "disable", and set the turn on and off dimming signal when "enable" selected. In turn off status, the driver will output minimum output voltage, please make sure the LED lamp can be turned off when applied with this level voltage.

• Dimming Logic

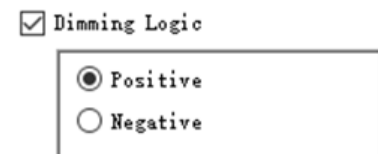


☒ Dimming Logic

☒ Positive ☐ Negative

Click ON "☒" to activate the dimming logic configuration, default setting is "Positive" logic, it means the output current will increase with the dimming signal level up; and "Negative" logic will decrease the output current with dimming signal level up.

• Set Minimum Dimming Level

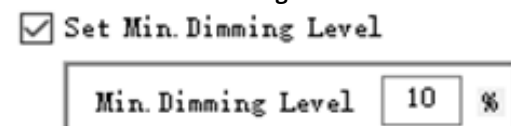

☒ Set Min. Dimming Level

Min. Dimming Level **10** %

Set the minimum dimming output current, default setting is 10%

MCA(B)-600 Series

600W Outdoor Driver


Project Name:	
Type:	

• Dimming Signal Configuration

☒ Configure Dimming Signal

Signal Voltage setting:

Compliant with analog and PWM signal:
 1) Analog: 0-10V
 2) PWM: Low level-0V, High Level-10V

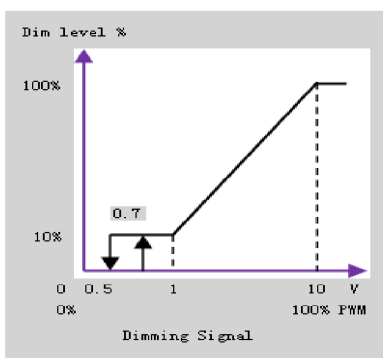

Click ON "☒" to activate dimming signal configuration, the dimming signal can be analog or PWM signal, here to set the value of the high level of these two signals, the setting can be:

0-3.3V, 0-5V, 0-9V, 0-10V

For example, if 0-10V is selected, the dimming signal will be:

- 1.) Analog: 0-10V.
- 2.) PWM: Low level-0V, High Level-10V.

This graph presents how the output current will react to the dimming signal, including analog and PWM dimming signal.

• Configure Time Step Dimming (TSD)

☒ Configure Time Step Dimming

	Hour	Minute	Power
(0) <input checked="" type="checkbox"/>	10	Second(Soft Start)	
(1) <input checked="" type="checkbox"/>	4	0	100 %
(2) <input checked="" type="checkbox"/>	1	0	80 %
(3) <input checked="" type="checkbox"/>	2	0	60 %
(4) <input checked="" type="checkbox"/>	1	0	80 %
(5) <input checked="" type="checkbox"/>	3	0	100 %
(6) <input type="checkbox"/>	0	0	10 %
(7) <input type="checkbox"/>	0	0	10 %

Click ON "☒" to activate Time Step Dimming configuration


Step(0): Setting the fading time of soft start, maximum value can be 10 seconds.

Step (1)-(7): Maximum time step number is 7, and the output current can be set according to the customer requirements to save energy.

MCA(B)-600 Series

600W Outdoor Driver

Project Name:	
Type:	

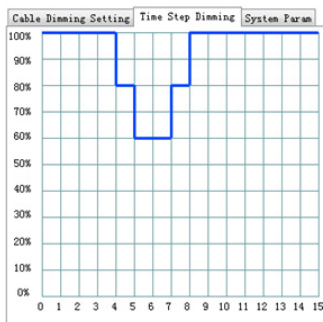

The graph presents how the output current will react to the setting of time step dimming.

• Configure NTC Protection

☒ Configure NTC Protection

☐ Enable
 ☒ Disable

NTC Value: °C

Click ON “☒” to activate NTC configuration Choose “enable” or “disable”, and set NTC value when “enable” selected.

• LED Lumen Compensation (LLC)

☒ LED Lumen Compensation

☐ Enable
 ☒ Disable

Time (kHour)	Compensation (%)
1	
14	

Click ON “☒” to activate NTC configuration Choose “enable” or “disable”, and set Time VS Compensation value when “enable” selected.

The compensation can be set for maximum 14 periods, “Time” Column define the working hours for the defined “Compensation” ratio. For example, if “compensation” is set to 1%, and the corresponding “Time” is set to 10, that means the output current will be set to 101% of rated current for 10K hours at this interval.

• Program



Program

Click “Program” button to burn the setting into drivers.

MCA(B)-600 Series

600W Outdoor Driver

MECHANICAL OUTLINE

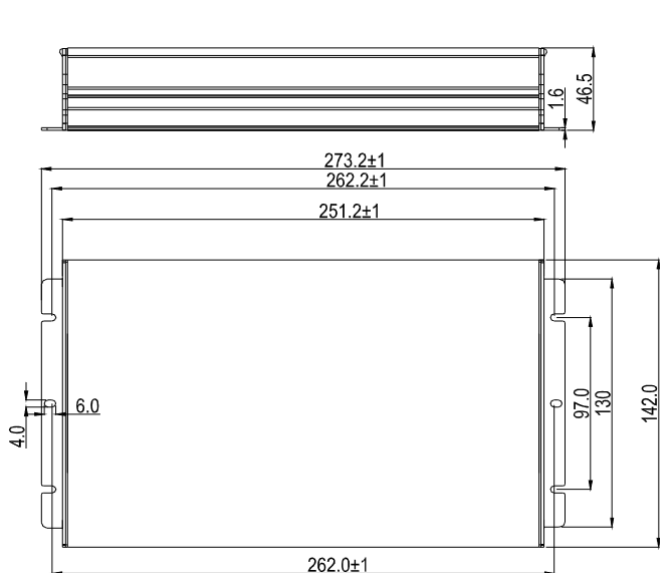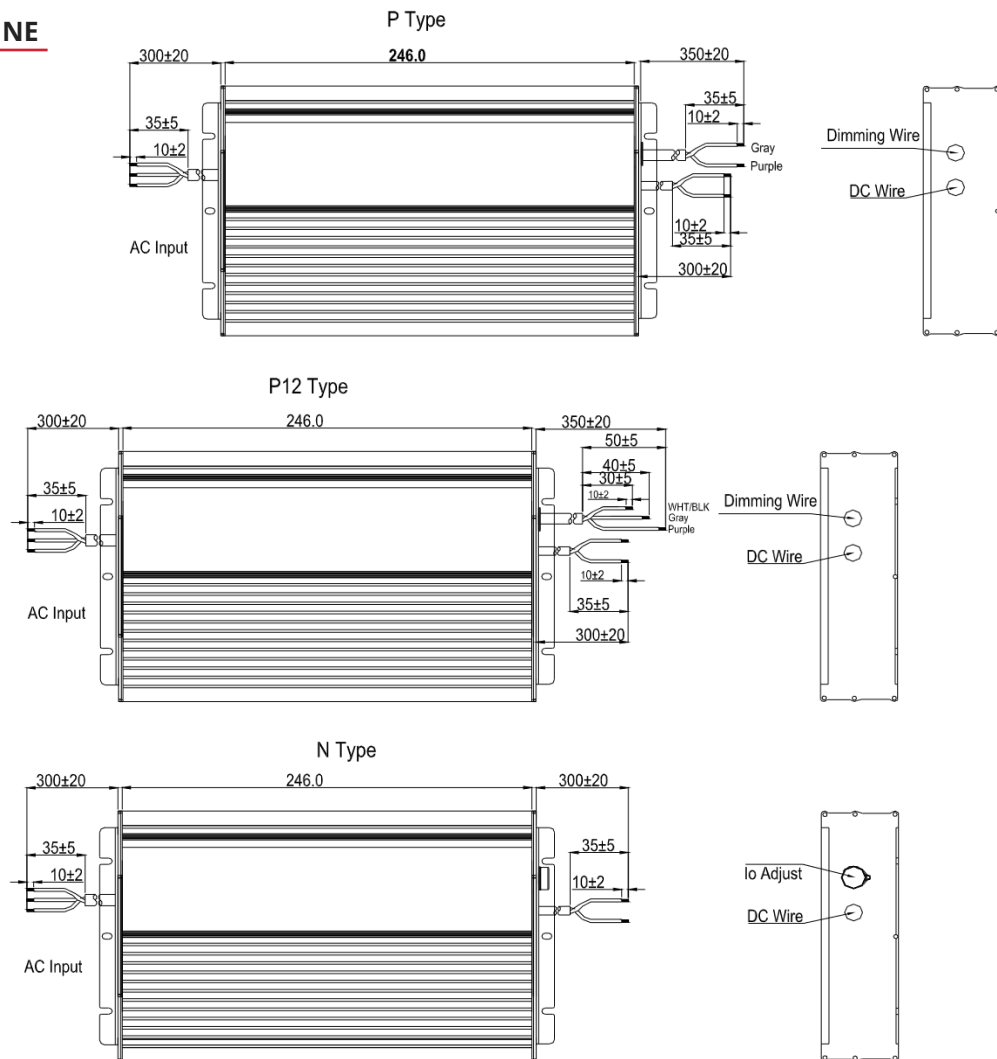


WIRE	SPECIFICATION	NOTE
Input	CCC+VDE H05RN-F 3*1.0mm ² L=300mm	for CE
	18AWG*3C SJOW L=300mm	for UL
Output	CCC+VDE H05RN-F 2*1.0mm ² L=300mm	for CE
	18AWG*2C SJOW L=300mm	for UL
Dimming	22AWG*2C UL2733 L=350mm	for P
	22AWG*3C UL21996 L=350mm	for P12


MCA(B)-600 Series

600W Outdoor Driver



P Type

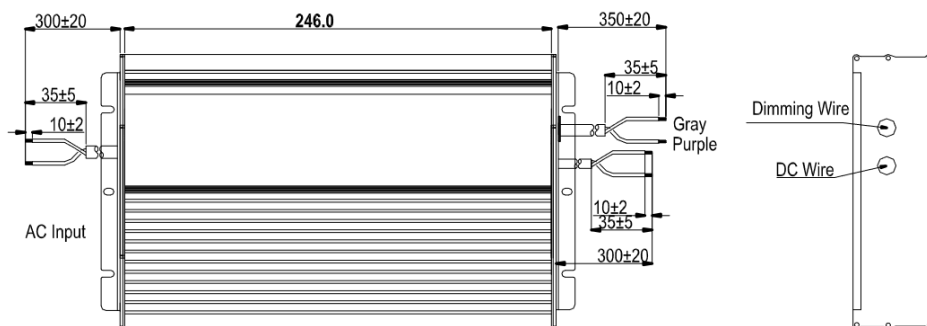

P12 Type

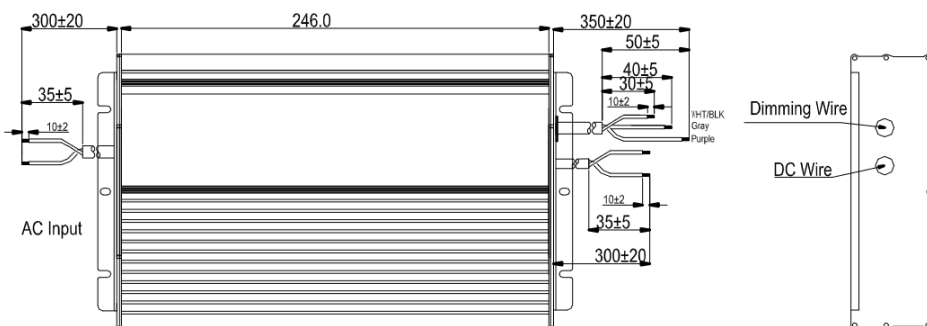

N Type

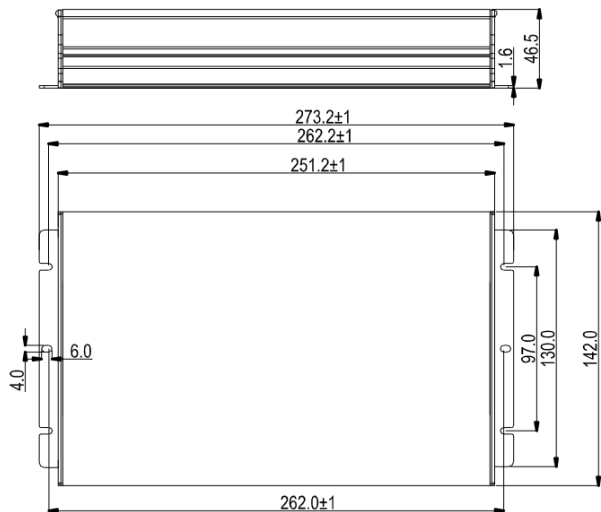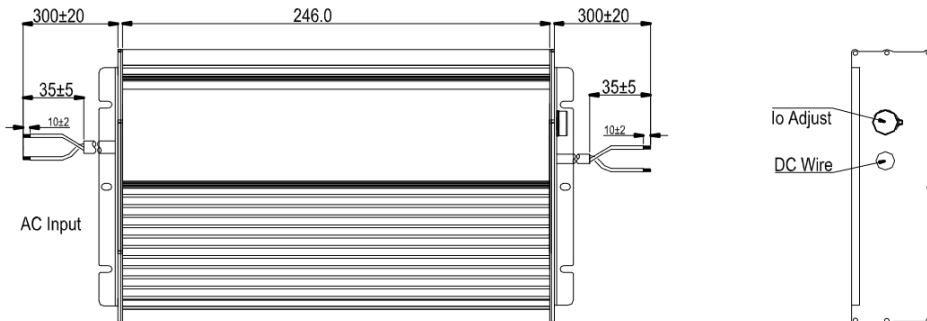

WIRE	SPECIFICATION	NOTE
Input	CCC+VDE H05RN-F 2*1.0mm ² L=300mm	for CE
Output	18AWG*2C SJOW L=300mm	for CE
Dimming	22AWG*2C UL2733 L=350mm	for P
	22AWG*3C UL21996 L=350mm	for P12