

# MCF(G)-105W Series

105 Watts Outdoor Driver

## PRODUCT FEATURE

- Input voltage range: 90~305 Vac;
- Constant power design, outputs programmable;
- Adjustable output current by software
- Multiple dimming capability (P types): 0/1~10Vdc / PWM / Step time dimming;
- Dim to Off
- Support DALI Dimming (L types): DALI-2 DT6;
- Provide auxiliary power: 5V/ 12V/ 24V, 2.4W max;
- Surge protection: 5KV line-line, 10KV line-earth;
- Protections: SCP / OVP / OTP;
- IP67 design for indoor and outdoor applications;
- Suitable for dry / damp / wet locations;
- 5 years warranty

Notes : MCF-105 is Class I type, MCG-105 is Class II type

## APPLICATION

Street Lighting, architecture lighting, industrial lighting, flood lighting, etc.

## MODEL ENCODING

**M C F - 105 - 062 XY**

① ② ③ ④ ⑤ ⑥

SERIAL NUMBER	ITEM	DEFINITION
①	Structure	<b>M:</b> Metal case <b>P:</b> Plastic case <b>O:</b> Open frame  (It can add module power supply, iron shell power supply, and etc.)
②	Type	<b>C:</b> Constant current <b>V:</b> Constant voltage <b>P:</b> Constant current & constant voltage  (Other specifications can be defined later, such as <b>I:</b> Industrial power supply, <b>R:</b> Rainproof power supply, <b>S:</b> Customized power supply, etc.)
③	Series Name	<b>F:</b> Class I <b>G:</b> Class II
④	Rated Wattage	3 to 4 digits (such as 105 means 105)
⑤	Output Voltage	Maximum voltage
⑥	Dimming	<b>X (N):</b> No dimming, <b>P :</b> Programmable with wire dimming and time step dimming, <b>L :</b> DALI dimming <b>Y (Y=0-24v auxiliary power supply)</b>



## WARRANTY

- See [Limited Warranty Policy](#) for more additional information

DIMMING	FUNCTION	NOTES
P	Programmable with wire dimming and time step dimming	
L	Dimming capability EN62386-101(DALI-2), EN62386-102(DALI-2), EN62386-207(DALI-2)	
P12	Programmable with wire dimming and time step dimming, 12v auxiliary power supply	Auxiliary power supply isolated from the output.
L5	Dimming capability EN62386-101(DALI-2), EN62386-102(DALI-2), EN62386-207(DALI-2), 5V auxiliary power supply	
L12	Dimming capability EN62386-101(DALI-2), EN62386-102(DALI-2), EN62386-207(DALI-2), 12v auxiliary power supply	
L24	Dimming capability EN62386-101(DALI-2), EN62386-102(DALI-2), EN62386-207(DALI-2), 24V auxiliary power supply	

# MCF(G)-105W Series

105 Watts Outdoor Driver

SPECIFICATION					
MODEL		41	62	100	150
MCF(G)-105-XXX					
INPUT	Efficiency (230Vac)(Typ.)	90%	91%	91%	92%
	Voltage Range (V)	90~305VAC, or 127 ~ 430VDC			
	Rated Voltage (V)	100~277VAC			
	Frequency Range (Hz)	47~63			
	Power Factor	PF>0.97/120VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load			
	THD	THD<10% when output loading≥50% at 120VAC/230VAC THD<15% when output loading≥50% at 50VAC/277VAC (Take refer to THD vs. Load Curve for details)			
	AC Current (Max.)	1.5A MAX at 120Vac, 0.7A MAX at 230Vac			
	Inrush Current (Max.)	COLD START 75A (twidth=316μs measured at 50% Ipeak) at 230VAC, Per NEMA410			
	Leakage Current (Max.)	0.75mA at 277VAC/ 60Hz			
	MAX. No. of PSUs on 16A Circuit Breaker	3 units (circuit breaker of type B) / 6 units breaker of type C) at 230VAC			
	Standby Power Consumption	Standby Power Consumption <0.5W			
	OUTPUT	Rated Output Voltage (V)	30 – 41	42 – 62	75 – 100
Output Voltage Range (V)		20 – 41	38 – 62	50 – 100	75 – 150
Rated Current (A)		2.56 – 3.50	1.69 – 2.50	1.05 – 1.40	0.70 – 1.05
Rated Power (W)		105			
Output Current Setting Range/ Dimming Range (A)		0.35 – 3.50	0.25 – 2.50	0.14 – 1.40	0.11 – 1.05
Constant Power Setting Range (A)		2.56 – 3.50	1.69 – 2.50	1.05 – 1.40	0.70 – 1.05
Ripple Current (Typ.)		5% of Io_max. ((PK-AV) /AV) with LED loading mode and full load.)			
Current Tolerance		<5%			
Line Regulation		<1%			
Load Regulation		<3%			
Setup Time		<2s, at 120Vac; <0.5s, at 230Vac			
DC AUX Power (P12 Type)		5V/ 12V/ 24V Selectable; Max Output Current: 200mA; Output Voltage Tolerance: ±10%; Max Output Power: 2.4W			
PROTECTION	Short Circuit Protect (SCP)	Hiccup mode, recover automatically with short circuit removed.			
	Over Voltage Protect (OVP)	Voltage limiting. Output current is decreased if the required loading voltage is higher than MAX. output voltage.			
	Over Temperature Protect (OTP)	Decrease the output current, but not less than 20% of rated output current, recover automatically once the fault condition is removed.			
ENVIRONMENTAL	Working Temperature	-40 – +60°C( Refer to 'Derating Curve' )			
	Max. Case Temperature (Tc)	90°C max			
	Working Humidity	20 – 95%RH			
	Storage Temp., Humidity	-40 – +85°C, 10-95%RH			
	Vibration	10-500Hz, 5G 12min/cycle, period for 72min each along X、Y、Z axes			

# MCF(G)-105W Series


105 Watts Outdoor Driver

<b>SAFETY &amp; EMC</b>	Safety Standard	UL8750, CSA C22.2 No. 250.13-12; ENEC EN61347-1, EN61347-2-13 independent, EN62384; GB19510.1, GB19510.14
	Withstand Voltage	I/P-O/P: 3.75kVac, I/P-FG: 1.65kVac, O/P-FG: 1.5kVac
	Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms (500VDC / 25°C / 70% RH)
	EMC Emission	FCC Part 15 Class B/ EN55015, EN61000-3-2 Class C, EN61000-3-3
	EMC Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11, EN61547 (Surge: L-N: ±5kV, L, N-FG: ±10kV)
<b>OTHERS</b>	MTBF	200000Hrs @25°C±10°C ambient temperature, 230Vac, 80% load (MIL-HDBK-217F)
	Lifetime	50000Hrs@80°C case temperature (Refer to 'Lifetime Curve')
	Dimension	164 x 66.2 x 36.8mm (L x W x H)
	Weight (Typ.)	750±50g/ PCS
<b>RELIABILITY</b>	Screen test <sup>(1)</sup>	336Hrs aging test @95°C & full load without temperature protection
Notes: 1. The test results are based on 14 samples with OTP moved 2. All the data are measured under room temperature if not specified.		

## OPERATING AREA I-V


**MCF(G)-105-041XY**

Output Voltage vs. Output Current

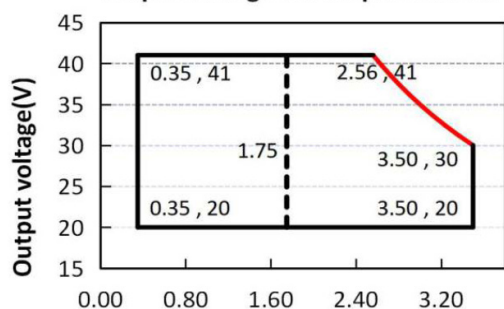


**MCF(G)-105-062XY**

Output Voltage vs. Output Current

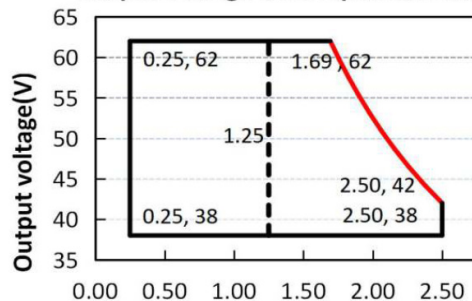


**MCF(G)-105-100XY**

Output Voltage vs. Output Current

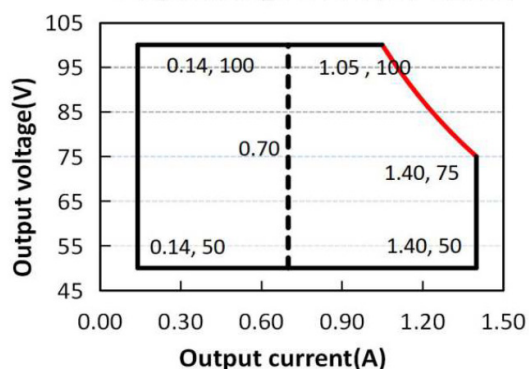

**MCF(G)-105-150XY**

Output Voltage vs. Output Current

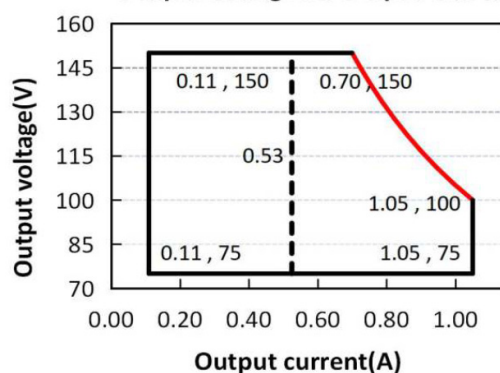


Notes: X=N is suitable for the right area of the dotted line;  
X=P/L is suitable for the solid line contain area.

# MCF(G)-105W Series


105 Watts Outdoor Driver

Project Name:	
Type:	


## INRUSH CURRENT WAVEFORM

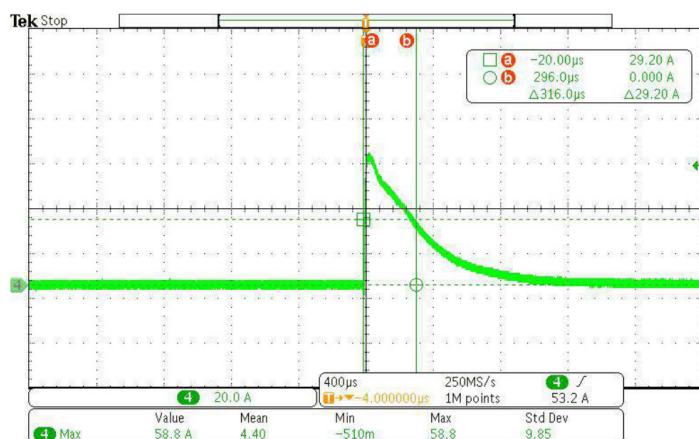


## DERATING CURVE

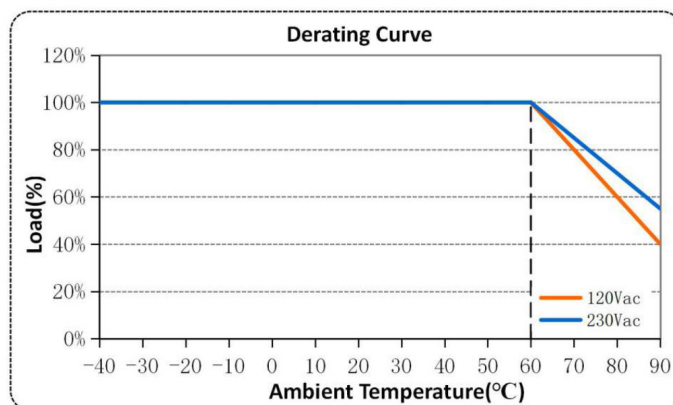

## OUTPUT POWER VS INPUT VOLTAGE

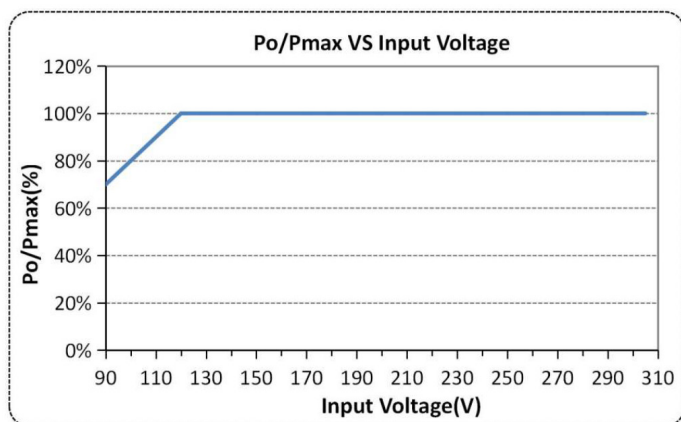

## LIFETIME VS CASE TEMPERATURE

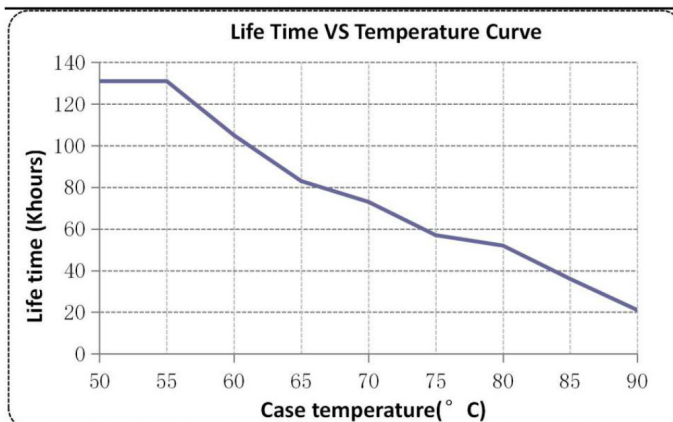


# MCF(G)-105W Series

105 Watts Outdoor Driver

## EFFICIENCY VS LOAD


**MCF(G)-105-041XY (Uo=36V)**

Efficiency VS Load

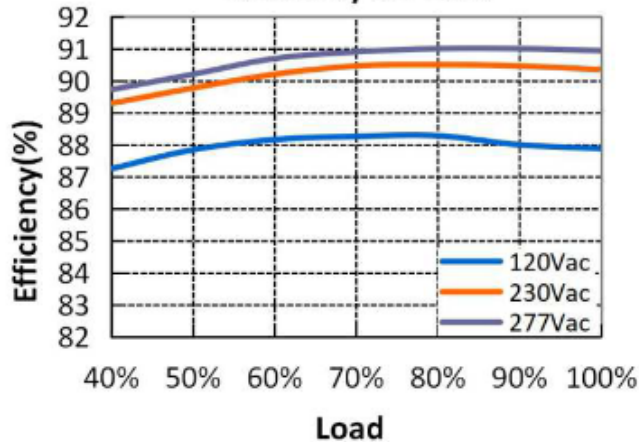


**MCF(G)-105-062XY (Uo=48V)**

Efficiency VS Load

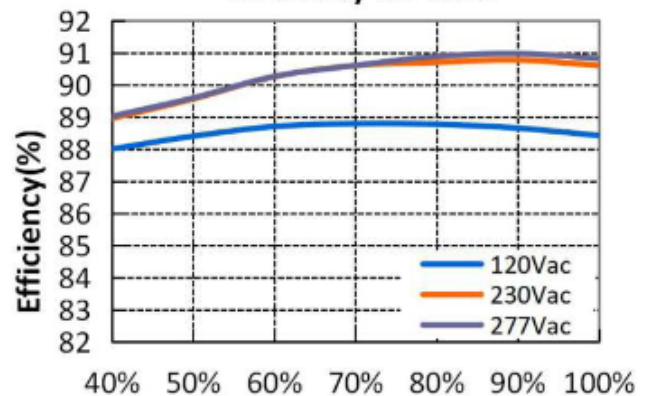


**MCF(G)-105-100XY (Io=1.05A)**

Efficiency VS Load

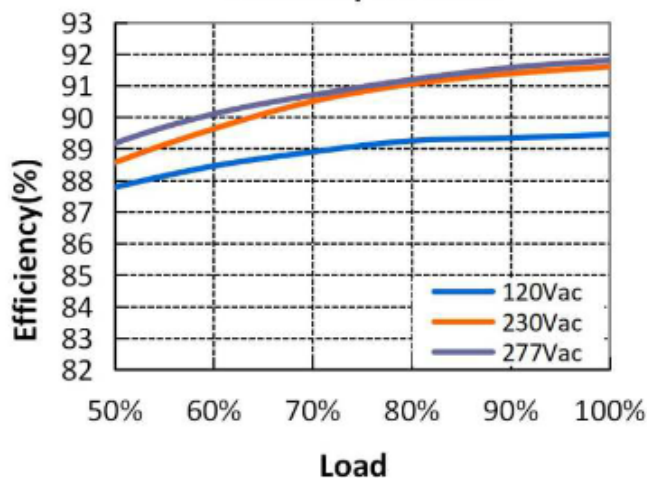


**MCF(G)-105-150XY (Io=0.7A)**


Efficiency VS Load

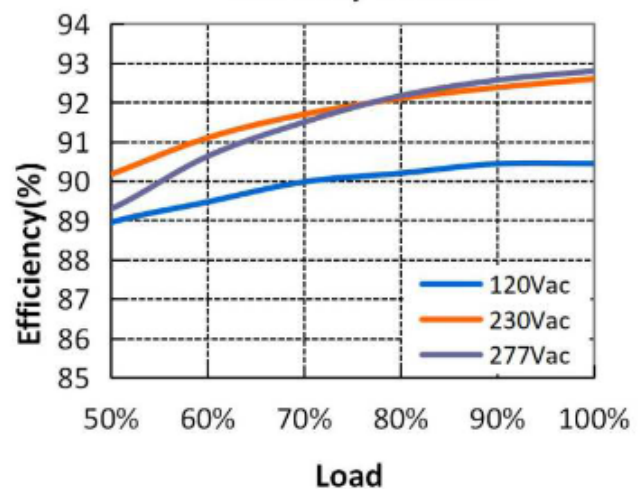

## POWER FACTOR VS LOAD

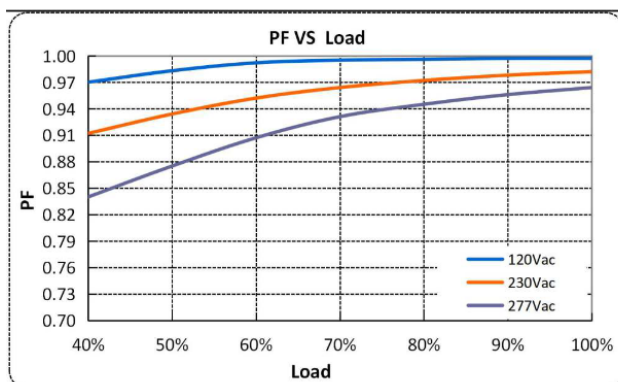

## TOTAL HARMONIC DISTORTION

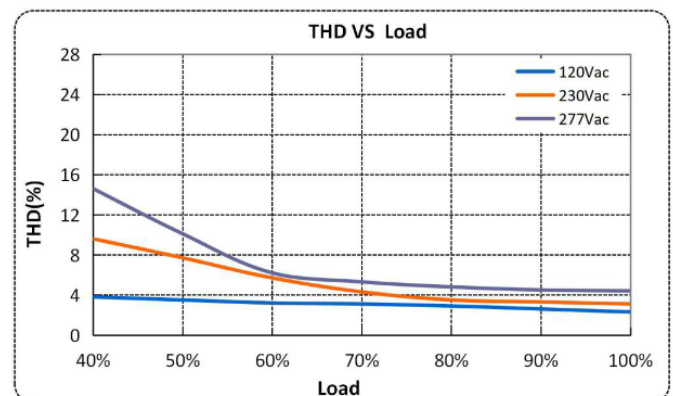


# MCF(G)-105W Series

105 Watts Outdoor Driver

## INSTRUCTION

### 1. Field Programmable Topology.

The programmable driver can be programmed by using special PC software and the programmer module.

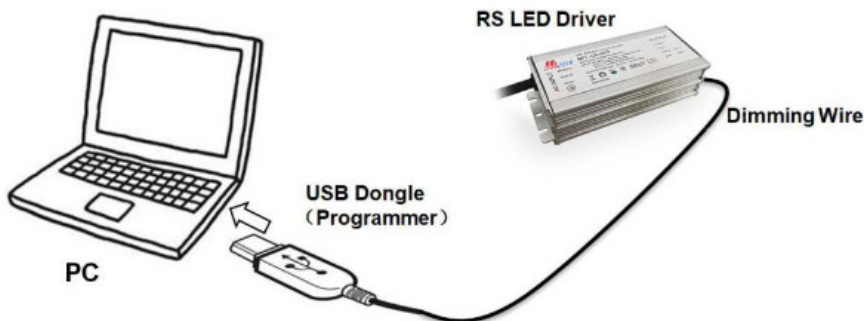

### 2. Dimming Interface Description

Pin description

PIN	NAME	VALUE	DESCRIPTION	COLOR
1	VAUX 5V/ 12V/ 24V	4.5V – 5.5V 10.8V – 13.2V 21.6V – 26.4V	Auxiliary DC power supply	Brown
2	VAUX GND	0V	Auxiliary DC power ground	Blue
3	Dim+/ Prog+	0 – 10V	Dimming/ Programming input	White
4	Dim-/ Com	0V	Common terminal of Dim/ Prog./ Aux	Black

### 3. Dimming Software Function Instruction

#### • Communication Setup




Click "Connect" to set up the link between the computer and the USB dongle.

#### • Driver Identification




Click "Read" to identify the driver, then fill in the part number and max current automatically.

#### • Adjustable Output Current (AOC)



Click ON "☑" to activate the output current configuration, I. Max(Spec) is filled in automatically during identify driver, I. Set can be filled in any value lower than I. Max(spec).

#### • Dimming Selection and Setting



Click ON "☑" to activate the dimming selection and setting, or else no update during current setting. Choose one of the control method listed below to go with, then the related setting interface will appear.

# MCF(G)-105W Series

105 Watts Outdoor Driver

Project Name:	
Type:	

## • Turn-Off signal setting

☒ Turn-off Setting

☒ Enable
 ☐ Disable

Off Signal Level  %

On Signal Level  %

Click ON “☒” to activate the turn-off function configuration. Choose “enable” or “disable”, and set the turn on and off dimming signal when “enable” selected. In turn off status, the driver will output minimum output voltage, please make sure the LED lamp can be turned off when applied with this level voltage.

## • Dimming Logic

☒ Dimming Logic

☒ Positive
 ☐ Negative

Click ON “☒” to activate the dimming logic configuration, default setting is “Positive” logic, it means the output current will increase with the dimming signal level up; and “Negative” logic will decrease the output current with dimming signal level up.

## • Set Minimum Dimming Level

☒ Set Min. Dimming Level

Min. Dimming Level  %

Set the minimum dimming output current, default setting is 10%

## • Dimming Signal Configuration

☒ Configure Dimming Signal

Signal Voltage setting:

Compliant with analog and PWM signal:  
 1) Analog: 0-10V  
 2) PWM: Low level-0V, High Level-10V


Click ON “☒” to activate dimming signal configuration, the dimming signal can be analog or PWM signal, here to set the value of the high level of these two signals, the setting can be:

0-3.3V, 0-5V, 0-9V, 0-10V

For example, if 0-10V is selected, the dimming signal will be:

- 1.) Analog: 0-10V.
- 2.) PWM: Low level-0V, High Level-10V.

This graph presents how the output current will react to the dimming signal, including analog and PWM dimming signal.

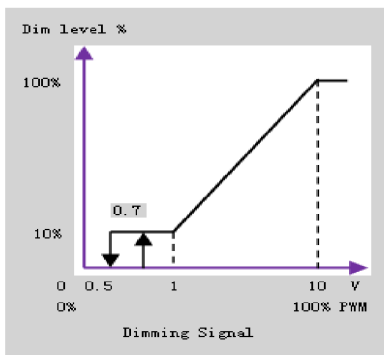

Project Name:	
Type:	

# MCF(G)-105W Series

105 Watts Outdoor Driver


## • Configure Time Step Dimming (TSD)

☒ Configure Time Step Dimming

(0) ☒ 10 Second(Soft Start)

	Hour	Minute	Power
(1)	4	0	100 %
(2)	1	0	80 %
(3)	2	0	60 %
(4)	1	0	80 %
(5)	3	0	100 %
(6)	0	0	10 %
(7)	0	0	10 %

Cable Dimming Setting Time Step Dimming System Param

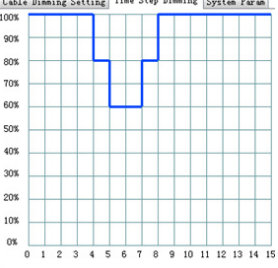

Click ON "☒" to activate Time Step Dimming configuration

Step(0): Setting the fading time of soft start, maximum value can be 10 seconds.

Step (1)-(7): Maximum time step number is 7, and the output current can be set according to the customer requirements to save energy.

The graph presents how the output current will react to the setting of time step dimming.

## • Configure NTC Protection

☒ Configure NTC Protection

☐ Enabel ☒ Disable

NTC Value: 90 °C

Click ON "☒" to activate NTC configuration Choose "enable" or "disable", and set NTC value when "enable" selected.

## • LED Lumen Compensation (LLC)

☒ LED Lumen Compensation

☐ Enabel ☒ Disable

Time (kHour)	Compensation(%)
1	
14	

Click ON "☒" to activate NTC configuration Choose "enable" or "disable", and set Time VS Compensation value when "enable" selected.

The compensation can be set for maximum 14 periods, "Time" Colum define the working hours for the defined "Compensation" ratio. For example, if "compensation" is set to 1%, and the corresponding "Time" is set to 10, that means the output current will be set to 101% of rated current for 10K hours at this interval.

## • Program

Program

Click "Program" button to burn the setting into drivers.

# MCF(G)-105W Series

105 Watts Outdoor Driver


## INSTRUCTION (L type)

### 1. Dimming Interface Description

Pin Description


PIN	NAME	VALUE	DESCRIPTION	COLOR
1	VAUX 5V/ 12V/ 24V	4.5V – 5.5V 10.8V – 13.2V 21.6V – 26.4V	Auxiliary DC power supply	Brown
2	VAUX GND	0V	Auxiliary DC power ground	Blue
3	DA		Dimming input	White
4	DA		Dimming input	Black

### 2.DALI INTERFACE

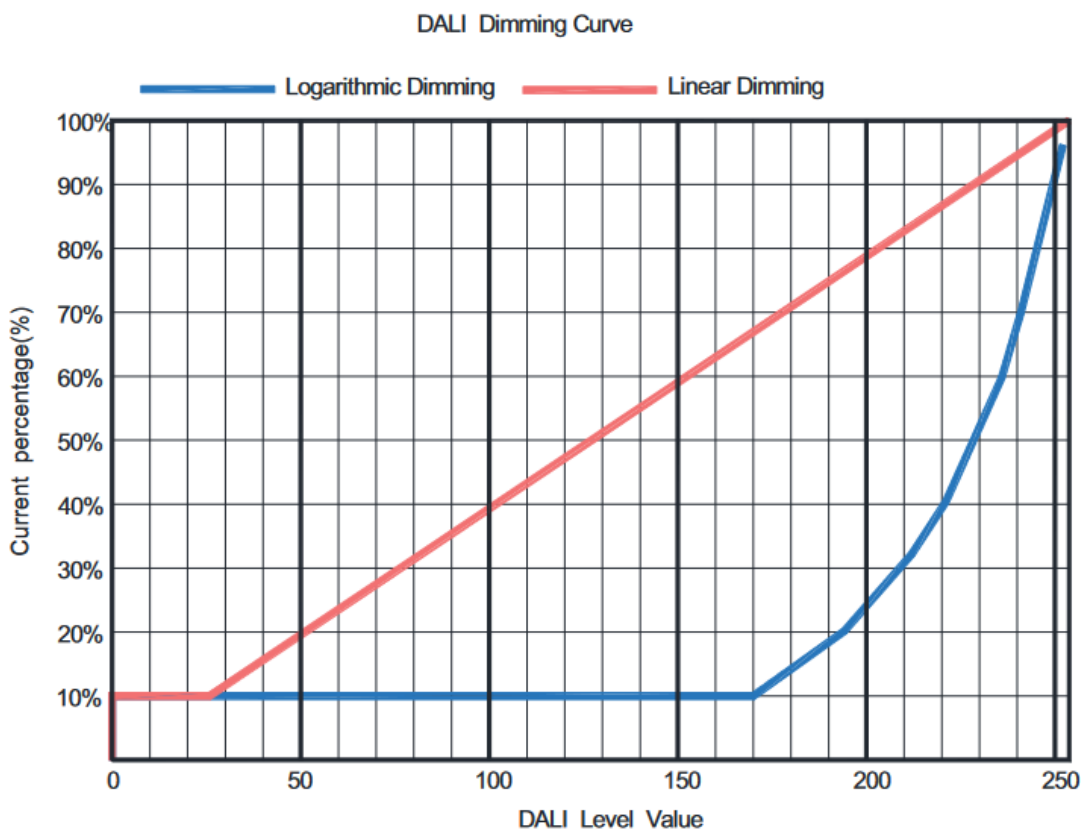


105 Watts Outdoor Driver

## MCF-105W

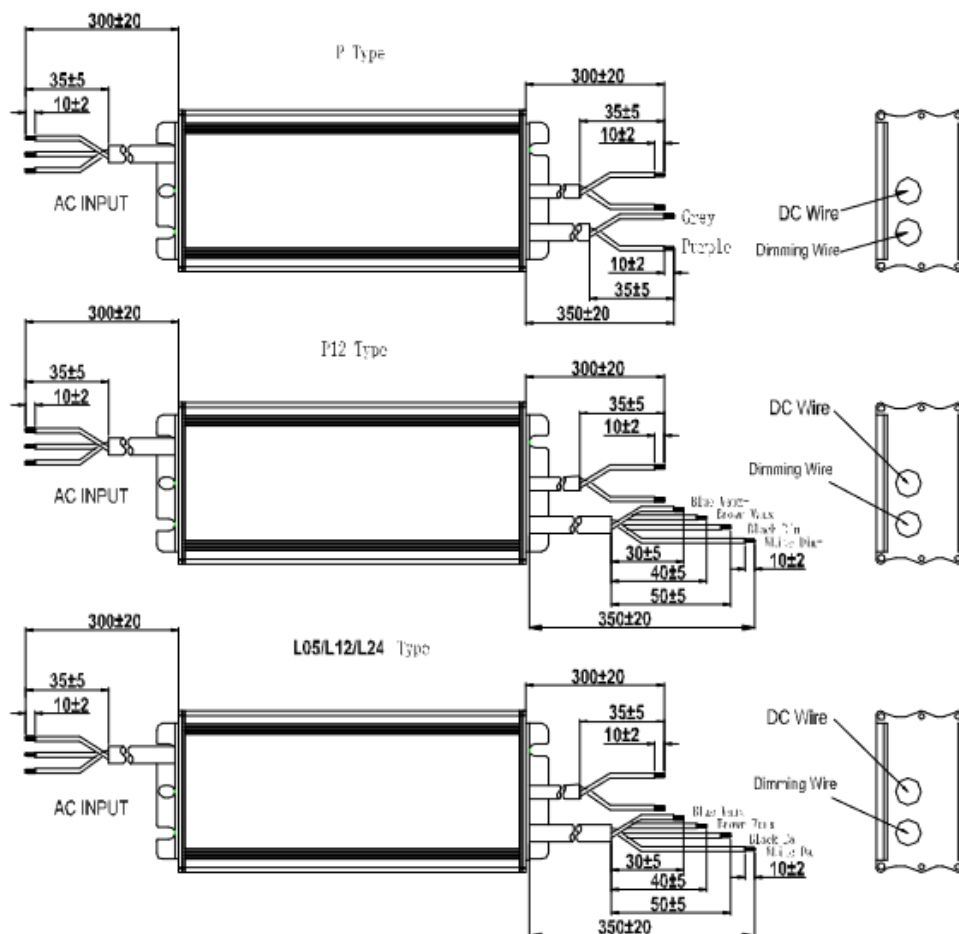


WIRE	SPECIFICATION	NOTE
INPUT	CCC+VDC H05RN-F 3*1.0MM2 L=300mm	For CE
	18AWG*3C SJOW L=300mm	For UL
OUTPUT	CCC+VDE H05RN-F 2*1.0mm2 L=300mm	For CE
	18AWG*2C SJOW L=300mm	For UL
DIMMING	22AWG*4C UL2733 L=350mm Dim+ (Purple) Dim- (Grey)	For P, for L
	22AWG*4C UL2517 L=350mm Vaux+ (Brown) Vaux- (Blue) Dim+ (White) Dim- (Black)	
	22AWG*4C UL2517 L=350mm Vaux+ (Brown) Vaux- (Blue) DA (White) Da (Black)	For P12
		For PL05, for L12

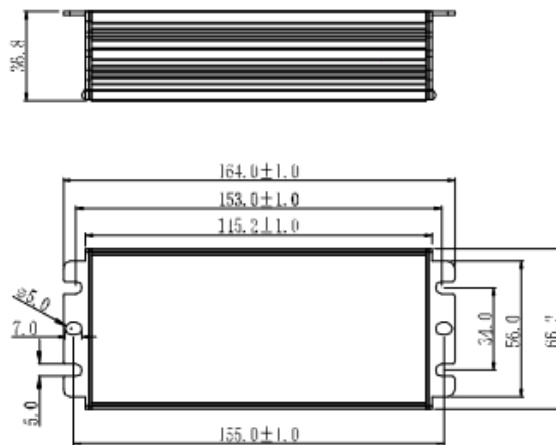

# MCF(G)-105W Series

105 Watts Outdoor Driver

## MCG-105W

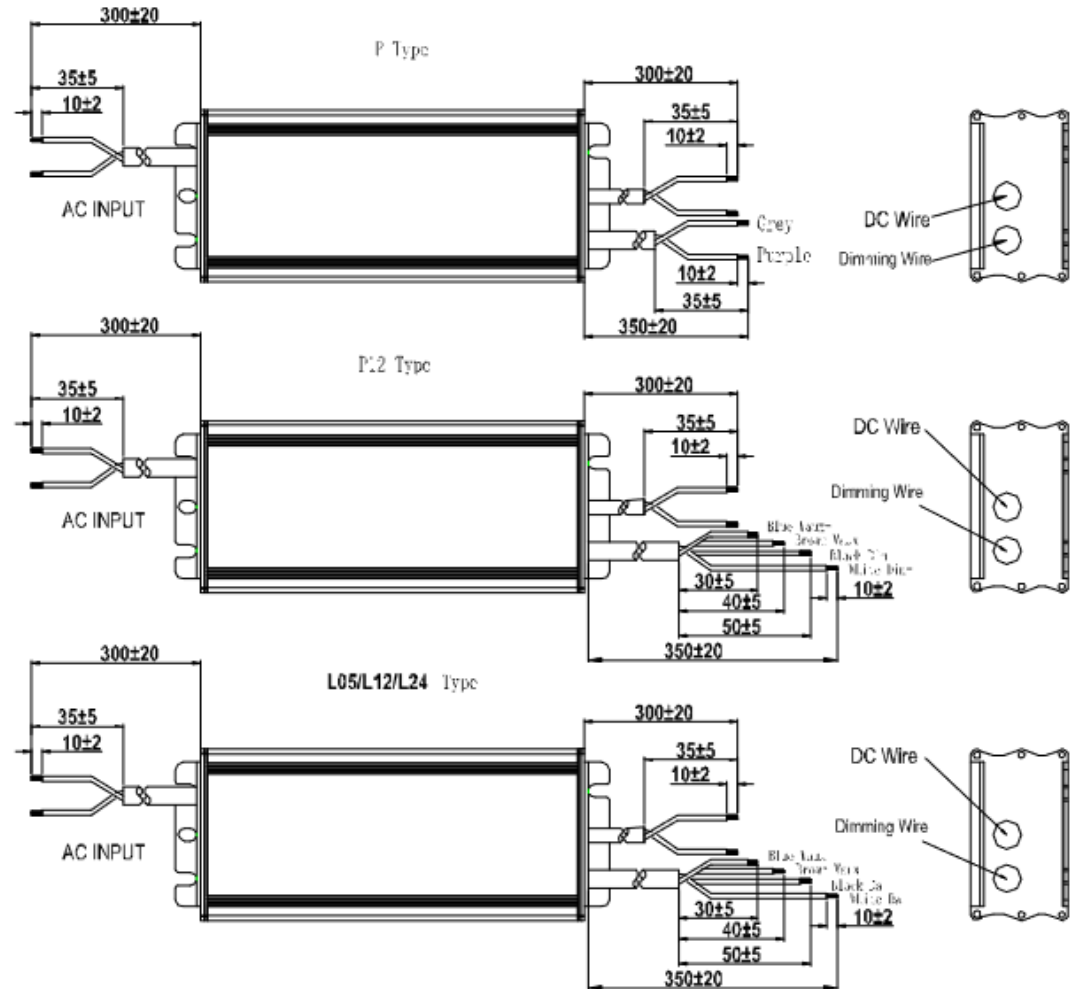

WIRE	SPECIFICATION	NOTE
INPUT	CCC+VDC H05RN-F 2*1.0mm <sup>2</sup> L=300mm	For CE
OUTPUT	18AWG*2C SJOW L=300mm	For CE
DIMMING	22AWG*4C UL2733 L=350mm Dim+ (Purple) Dim- (Grey)	For P, for L
	22AWG*4C UL2517 L=350mm Vaux+ (Brown) Vaux- (Blue) Dim+ (White) Dim- (Black)	For P12
	22AWG*4C UL2517 L=350mm Vaux+ (Brown) Vaux- (Blue) DA (White) Da (Black)	For L05, L12, L24

