

# CEX-800N

Chicago Approved Steel  
LED Exit Sign

## PRODUCT FEATURE

### CONSTRUCTION

- 20-gauge steel housing with white powder coating
- High temperature scratch-resistant red and white silk
- Impact-resistant glass lens
- Open-face glass panel

### ELECTRICAL

- Universal Voltage Input 120-277 VAC, 50/60 Hz
- Maximum Power consumptions 4W
- Solid-State Voltage Limited Charger
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

### MOUNTING

- Knockouts for conduit, pendant top mount, and end mount is standard
- Universal pattern knockouts on the backplate for direct mounting to junction box

### BATTERY

- RoHS compliance LiFePO4 battery
- Maintenance-free with a cycle life expectancy of 2000 times
- Performance over a wide range of temperatures

### LAMPS

- High Brightness White LEDs

### CODE COMPLIANCE

- UL 924 Listed
- Life Safety NFPA 101
- NEC/OSHA
- City of Chicago Fire Code

### WARRANTY


- See [Limited Warranty Policy](#) for more additional information

### RELATED PRODUCTS

- [CREE-800 Chicago Approved](#)
- [CEE-800 Chicago Approved](#)
- [CEX-8000N Chicago Approved](#)
- [CEM-960N Chicago Approved](#)
- [CEM-960N-HO Chicago Approved](#)



## DIMENSION

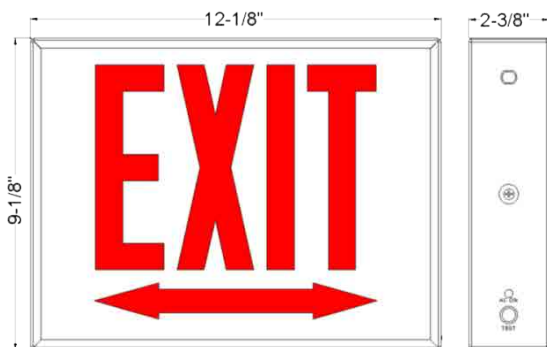

## ORDER INFORMATION: EXAMPLE: CEX-800N-DD-RC

CEX-800N	-	-
MODEL	FACE AND ARROW OPTION	REMOTE CAPABILITY
CEX-800N (Steel EXIT)	<b>S</b> Single face (No Arrow)	<b>BLANK</b> No remote capability
	<b>SR</b> Sing face (Right Arrow)	<b>RC</b> Remote capability (6V Max 4W)
	<b>SL</b> Single face (Left Arrow)	
	<b>SD</b> Single face (Double Arrow)	
	<b>D</b> Double face (No Arrow)	
	<b>DD</b> Double face (Double Arrow)	
	<b>DRL</b> Double face (Right/Left Arrow)	

CEX-800N Double face with one left arrow and one right arrow EXIT letter panel.

## DIRECTIONAL INDICATORS



No Arrow



Double Arrow



Right Arrow



Left Arrow