

CEE-800

Chicago Approved
LED Edge-Lit Exit Sign

PRODUCT FEATURE

CONSTRUCTION

- Anodized extruded aluminum or white finish
- Optical grade acrylic panels
- Bright red exit letter with white background
- Panels customized selected directional indicators
- Panels customized selected single or double face

ELECTRICAL

- Universal Voltage Input 120-277 VAC, 50/60 Hz
- Maximum Power consumptions 6.5W
- Solid-State Voltage Limited Charger
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

MOUNTING

- Pendant top mount and end mount are standard
- Direct mounting to junction box

BATTERY

- RoHS compliance LiFePO4 battery
- Maintenance-free with a cycle life expectancy of 2000 times
- Performance over a wide range of temperatures

LAMPS

- High Brightness White LEDs

CODE COMPLIANCE

- UL 924 Listed
- Life Safety NFPA 101
- NEC/OSHA
- City of Chicago Fire Code

WARRANTY


- See [Limited Warranty Policy](#) for more additional information

RELATED PRODUCTS

- [CEE-800 Chicago Approved](#)
- [CEX-800N Chicago Approved](#)
- [CEX-8000N Chicago Approved](#)
- [CEM-960N Chicago Approved](#)
- [CEM-960N-HO Chicago Approved](#)



DIMENSION

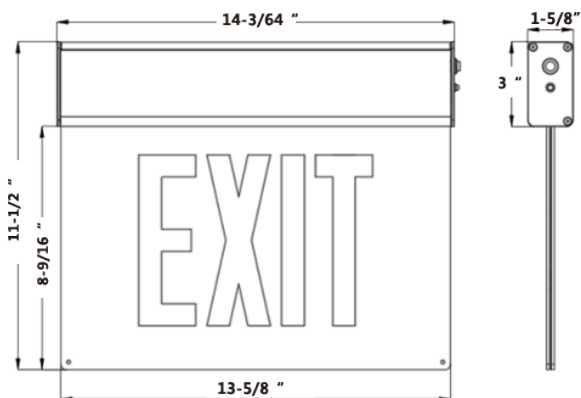

ORDER INFORMATION: EXAMPLE: CEE-800-DD-STAIRS

CEE-800	-	-
MODEL	FACE AND ARROW OPTION	REMOTE CAPABILITY
CEE-800	S Single face (No Arrow) SR Sing face (Right Arrow) SL Single face (Left Arrow) SD Single face (Double Arrow) D Double face (No Arrow) DD Double face (Double Arrow) DRL Double face (Right/Left Arrow)	BLANK Exit Sign STAIRS Stairs

CEE-800 Double face with one left arrow and one right arrow stairs letter panel.

DIRECTIONAL INDICATORS

