

Project Name:	
Type:	

CREE-800

Chicago Approved
LED Edge-Lit Exit Sign

PRODUCT FEATURE

CONSTRUCTION

- 20-gauge steel housing with white powder coating
- Extrusion slim type trim plate
- Optical grade acrylic panels
- Bright red exit letter with white background
- Panels customized selected directional indicators
- Panels customized selected single or double face

ELECTRICAL

- Universal Voltage Input 120-277 VAC, 50/60 Hz
- Maximum Power consumptions 4W
- Solid-State Voltage Limited Charger
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

MOUNTING

- Universal surface and recessed mounting kit
- Patent design for panel surface or wall changeable

BATTERY

- RoHS compliance LiFePO4 battery
- Maintenance-free with a cycle life expectancy of 2000 times
- Performance over a wide range of temperatures



LAMPS

- High Brightness White LEDs

CODE COMPLIANCE

- UL 924 Listed
- Life Safety NFPA 101
- NEC/OSHA
- City of Chicago Fire Code


WARRANTY

- See [Limited Warranty Policy](#) for more additional information

RELATED PRODUCTS

- [CEE-800 Chicago Approved](#)
- [CEX-800N Chicago Approved](#)
- [CEX-8000N Chicago Approved](#)
- [CEM-960N Chicago Approved](#)
- [CEM-960N-HO Chicago Approved](#)

DIMENSION

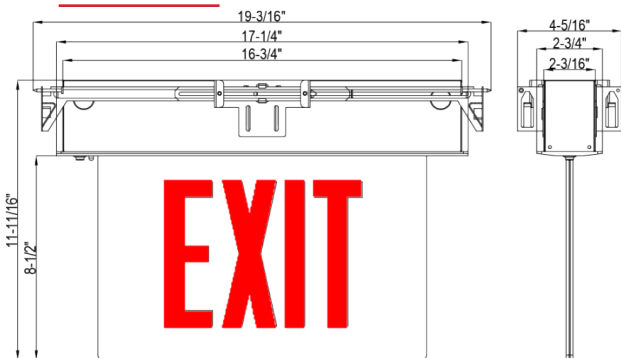

ORDER INFORMATION: EXAMPLE: CREE-800-DRL-BLACK-BR-U

CREE-800	MODEL	FACE AND ARROW OPTION	REMOTE CAPABILITY	REMOTE CAPABILITY	REMOTE CAPABILITY
CREE-800	S	Single face (No Arrow)	BLANK	Exit Sign	U
	SR	Single face (Right Arrow)	STAIRS	Stairs	Add External surface kit
	SL	Single face (Left Arrow)			
	SD	Single face (Double Arrow)			
	D	Double face (No Arrow)			
	DD	Double face (Double Arrow)			
	DRL	Double face (Right/Left Arrow)			

CREE-800 Double face with one left arrow and one right arrow stairs letter panel.

DIRECTIONAL INDICATORS

