

Project Name:	
Type:	

CEE-800

Chicago Approved
LED Edge-Lit Exit Sign

PRODUCT FEATURE :

CONSTRUCTION

- Anodized extruded aluminum or white finish
- Optical grade acrylic panels
- Bright red exit letter with white background
- Panels customized selected directional indicators
- Panels customized selected single or double face

ELECTRICAL

- Universal Voltage Input 120-277 VAC, 50/60 Hz
- Maximum Power consumptions 6.5W
- Solid-State Voltage Limited Charger
- Overload/Short Circuit Protection
- Test Switch/Power Indicator Light

MOUNTING

- Pendant top mount and end mount are standard
- Direct mounting to junction box

BATTERY

- RoHS compliance LiFePO4 battery
- Maintenance-free with a cycle life expectancy of 2000 times
- Performance over a wide range of temperatures

LAMPS

- High Brightness White LEDs

CODE COMPLIANCE

- UL 924 Listed
- Life Safety NFPA 101
- NEC/OSHA
- City of Chicago Fire Code

WARRANTY

- See [Limited Warranty Policy](#) for more additional information



RELATED PRODUCTS

- ↗ [CEE-800 Chicago Approved](#)
- ↗ [CEX-800N Chicago Approved](#)
- ↗ [CEX-8000N Chicago Approved](#)
- ↗ [CEM-960N Chicago Approved](#)
- ↗ [CEM-960N-HO Chicago Approved](#)

ORDER INFORMATION: *EXAMPLE: CEE-800-DRL-S-WH*

CEE-800	-	-	-
MODEL	FACE AND ARROW OPTION	SIGN LETTER	HOUSING COLOR
CEE-800 (Steel EXIT)	S Single face (No Arrow)	BLANK Represent for EXIT	AL Aluminum (Anodized)
	SR Sing face (Right Arrow)		WH White (Painted)
	SL Single face (Left Arrow)	S Represent for STAIRS	BK Black (Anodized)
	SD Single face (Double Arrow)		
CEE-810 (AC only)	D Double face (No Arrow)		
	DD Double face (Double Arrow)		
	DRL Double face (Right/Left Arrow)		


CEE-800 Double face with one left arrow and one right arrow stairs letter panel.
CEE-810: It is AC only, no Remote capability.

Project Name:	
Type:	


CEE-800

Chicago Approved
LED Edge-Lit Exit Sign

DIRECTIONAL INDICATORS

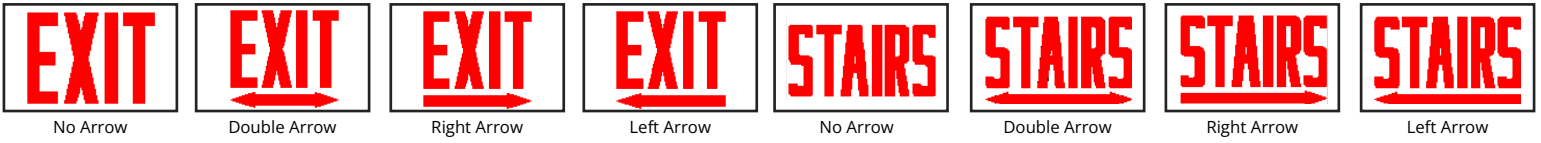

DIMENSION :

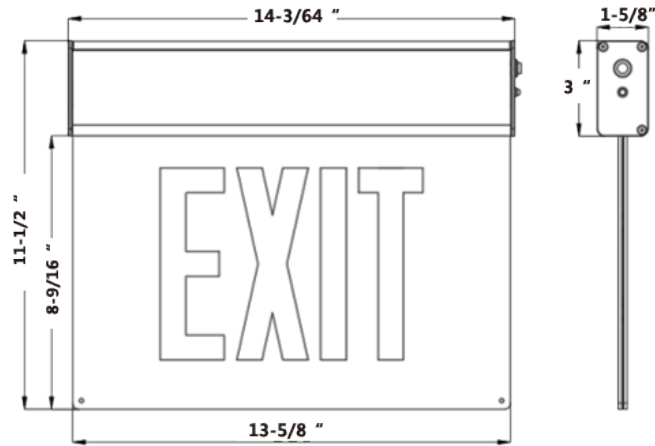

PACKAGING :

