

Dimmable LED Drivers

- Grow lighting
- Street lighting
- Stadium lighting
- Industrial lighting
- Architecture lighting



Office: (702) 364 - 9998

Fax: (702) 364 - 1562

Email: csupport@magtechind.com | sales@magtechind.com

Address: 5625-A Arville ST. Las Vegas, NV 89118




Product Series

	Pages
Q Series	04
M Series	04
MD Series	05
MDH Serres	05
QM Series	06
DA-010 Converter	06
DA-020 Converter	07
LD Series	07
Metal Enclosure Junction Box	08

Wireless Compatible

Atom In-wall Switch	09
ZBA-T001	10
Product Dimension	11 - 19

Key Milestones

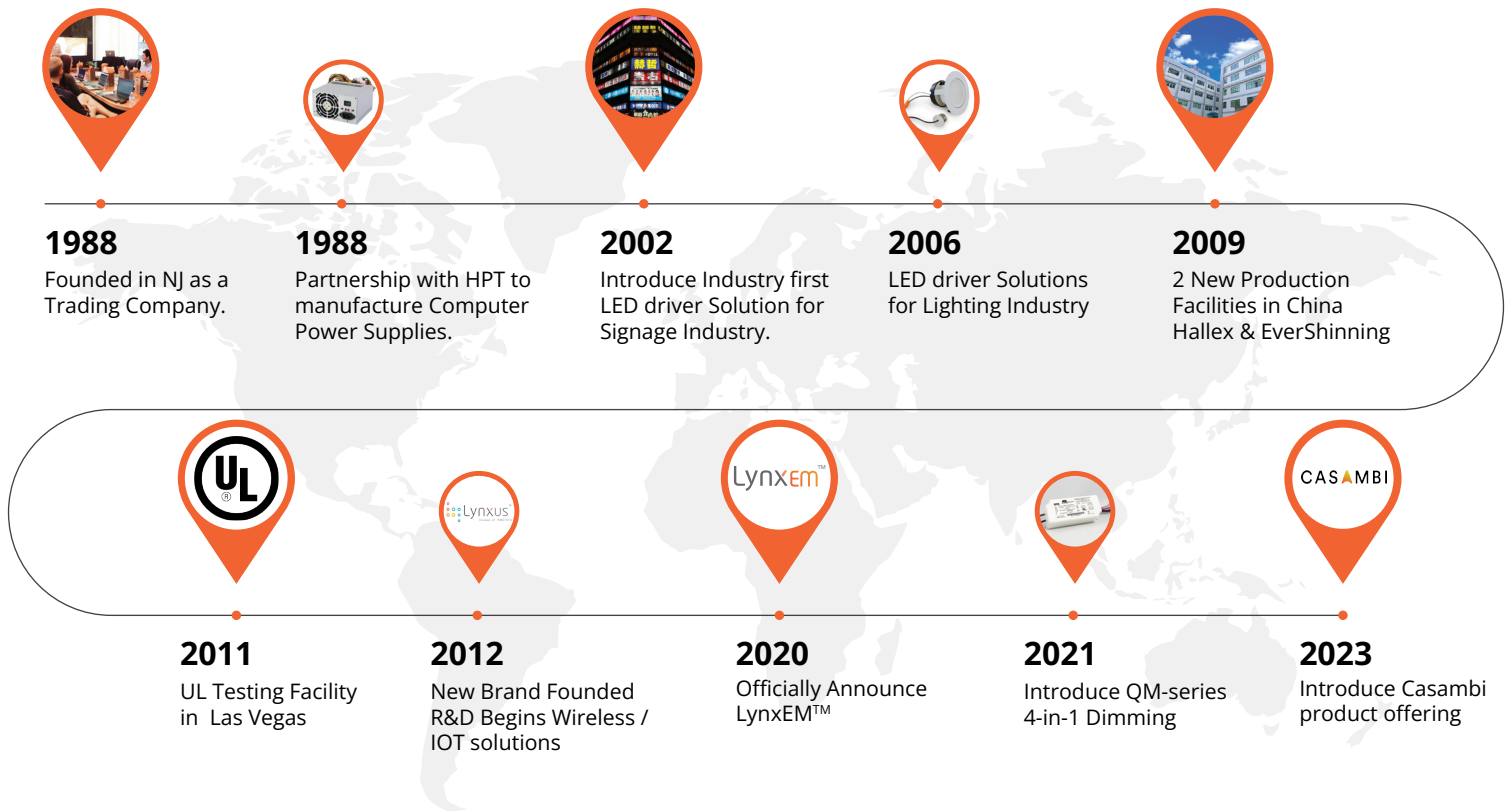

HISTORY AND BASE TECHNOLOGIES

- Since 2002, we have switched runway from commercial IT power supply to support of lighting industry and focus on switching-model LED driver designs
- The very first design was a 60-100W, UL Class 2, constant power design for signage applications with IP67 ingress rating
- In the same year, we start making DC/DC buck driver for single LED applications
- The LP-series was launched in 2003 based on single stage fly-back design
- LD series was launched in 2005 for first generation of general lighting industry
- The M-series was launched in 2007 using PSR topology
- In 2008, we were the first manufacturer introducing “phase-cut, trailing-edge” dimmable LED driver
- Most of our designs are UL Class 2 with PSR topologies at that moment
- MCA-series is the first dual-stage design based on UL8750 non-class 2 and Class 2; ranged from 75W to 600W
- Future design will be focus on modular design concept to include variable control protocols
- NFC programmable output is available
- Phase-cut dimming methods has been perfected for both CC and CV outputs
- Multi-function /multi-features are focuses move forward to compete with lower end competitors

The Power to Drive Innovation

Magtech Industries Corporation

Available LED Driver Models



Q Series

- Available in plastic and metal (stud-mountable) design
- Constant current and constant voltage available.
- Compatible with 0-10V dimmers; source and sink
- UL8750 Class 2 / CE certified
- Full range AC input from 110-277VAC
- Dry & damp location; 0-10V Dimming



Model	# of Output	Output Type	Output	Max. Output	Aux.	Programmable	Max. Power	Dimming Methods					Control				Case Style			Safety Approval
			(VDC)	(mA)				TRIAC	ELV	0-10V	PWM	Dim %	Casambi	ZigBee	DALI2	D4i	Plastic	Metal	Aluminum	
Q12	1	CC/CV	12-54	1300		N	12			•							•	•		cUL, CE
Q22	1	CC/CV	12-54	2500		N	25			•							•	•		cUL, CE
Q38	1	CC/CV	24-72	1850		N	40			•							•	•		cUL, CE
Q48	1	CC/CV	24-72	2200		N	50			•							•	•		cUL, CE
Q58	1	CC/CV	24-72	2650		N	60			•							•	•		cUL, CE
Q68	1	CC/CV	24-72	3150		N	70			•							•	•		cUL, CE

Dimension: Page 08

Q12-XM, Q22-XM: 121 x 42 x 29mm
 Q12-XP, Q22-XP: 85.3 x 37.9 x 27.7mm
 Q38-XM, Q48-XM, Q58-XM, Q68-XM: 138 x 47 x 32mm
 Q38-XP, Q48-XP, Q58-XP, Q68-XP: 127.3 x 30 x 76.3mm



M Series

- Low cost single stage design
- Constant current available
- Compatible leading & trailing phase-cut dimmers.
- UL/ CE certified
- Full range AC input from 110-277VAC
- Dry & damp location; Multipurpose



Model	# of Output	Output Type	Output	Max. Output	Aux.	Programmable	Max. Power	Dimming Methods					Control				Case Style			Safety Approval
			(VDC)	(mA)				TRIAC	ELV	0-10V	PWM	Dim %	Casambi	ZigBee	DALI2	D4i	Plastic	Metal	Aluminum	
M9	1	CC	9-30	750		N	10	•	•								•			cUL, CE
M18	1	CC	10-30	830		N	22	•	•								•			cUL, CE
M28	1	CC	15-54	1250		N	30	•	•								•	•		cUL, CE
M38	1	CC	15-54	1660		N	40	•	•								•	•		cUL, CE
M48	1	CC	15-54	2090		N	50	•	•								•			cUL, CE

Dimension: Page 09

M9 Series : 70.5 x 34.5 x 25mm
 M18 Series : 85.3 x 38 x 27.7mm
 M28-XM & M38-XM Series : 121 x 42 x 29mm
 M28-XP & M38-XP Series : 88 x 41 x 30mm
 M27-XP Series : 71 x 41 x 29mm
 M48-XP Series : 138 x 47 x 41.3mm



MD Series



- Full range AC input 110-277VAC, 60/50Hz
- Constant current outputs
- Deep dimming level as low as 1%
- UL 8750 Class 2 Class P certified with HL mark
- Compact size suitable for dry and damp locations
- Dry & damp location; TRIAC/ ELV dimmable

Model	# of Output	Output Type	Output	Output Current	Aux.	Programmable	Max. Power	Dimming Methods					Control				Case Style			Safety Approval																			
			(VDC)	(mA)		Output	(Watts)	TRIAC	ELV	0-10V	PWM	Dim %	Casambi	ZigBee	DALI2	D4i	Plastic	Metal	Aluminum																				
MD22-U24-yyyx-Xz	1	CC	14-24	500-250		N	10	•	•									•	•		cUL, CE																		
MD22-U30-yyyx-Xz			16-30	400-200																											cUL, CE								
MD22-U36-yyyx-Xz			20-36	350-170																											cUL, CE								
MD22-U42-yyyx-Xz			27-42	300-150																											cUL, CE								
MD22-U54-yyyx-Xz			36-54	250-120																											cUL, CE								
MD22-U54-yyyx-Xz			14-24	1000-500			20	•	•											•	•		cUL, CE																
MD22-U30-yyyx-Xz			16-30	770-400																																			cUL, CE
MD22-U36-yyyx-Xz			20-36	670-340																																			cUL, CE
MD22-U42-yyyx-Xz			27-42	580-290																																			cUL, CE
MD22-U54-yyyx-Xz			36-54	450-230																																			cUL, CE
MD42-U24-yyyx-Xz	1	CC	14 - 24	2000 - 1000		N	40	•	•									•	•		cUL, CE																		
MD42-U30-yyyx-Xz			16 - 30	1540 - 800																											cUL, CE								
MD42-U36-yyyx-Xz			20 - 36	1340 - 670																											cUL, CE								
MD42-U42-yyyx-Xz			27 - 42	1150 - 580																											cUL, CE								
MD42-U54-yyyx-Xz			36 -54	890 - 450																											cUL, CE								

Dimension: Page 10

MD22-XM Series: 121 x 1.65 x 29mm
MD22-XM Series: 85.3 x 37.9 x 27.7mm
MD42-XM Series: 114 x 42 x 29mm
MD42-XM Series: 88 x 41 x 34.8mm



MDH SERIES



- Input voltage 100 - 277V (UL)
- Full dimming range: 5-100%
- High Efficiency, High Power Factor, Low THD; Flicker-free
- Silicon Potting
- Water level: IP65
- RoHS Compliance
- 3-in-1 dimming, leading & trailing edge & 0-10V compatible.

Model	# of Output	Output Type	Output	Output Current	Aux.	Programmable	Max. Power	Dimming Methods					Control				Case Style			Safety Approval
			(VDC)	(mA)		Output	(Watts)	TRIAC	ELV	0-10V	PWM	Dim %	Casambi	ZigBee	DALI2	D4i	Plastic	Metal	Aluminum	
MDH22-45-0200-S7D	1	CC	24 – 42	200		N	20	•	•	•		3%					•			cUL, CE
MDH22-45-0250-S7D	1	CC	24 – 42	250		N	20	•	•	•		3%					•			cUL, CE
MDH22-45-300-S7D	1	CC	24 – 42	300		N	20	•	•	•		3%					•			cUL, CE
MDH22-45-350-SD7	1	CC	24 – 42	350		N	20	•	•	•		3%					•			cUL, CE
MDH22-45-400-SD7	1	CC	24 – 42	400		N	20	•	•	•		3%					•			cUL, CE
MDH22-45-450-SD7	1	CC	24 – 42	450		N	20	•	•	•		3%					•			cUL, CE
MDH22-45-500-SD7	1	CC	24 – 42	500		N	20	•	•	•		3%					•			cUL, CE
MDH22-45-550-SD7	1	CC	21 – 36	550		N	20	•	•	•		3%					•			cUL, CE
MDH42-24-YYYY-S8D	1	CC	13 – 24	500 - 900		N	21.6	•	•	•		3%					•			cUL, CE
MDH42-36-YYYY-S8D	1	CC	21 – 36	500 - 900		N	32.4	•	•	•		3%					•			cUL, CE
MDH42-45-YYYY-S8D	1	CC	27 – 42	500 - 900		N	40.5	•	•	•		3%					•			cUL, CE
MDH62-24-YYYY-S9D	1	CC	13 – 24	900 – 1400		N	33.6	•	•	•		3%					•			cUL, CE
MDH62-36-YYYY-S9D	1	CC	21 – 36	900 – 1400		N	50.4	•	•	•		3%					•			cUL, CE
MDH62-45-YYYY-S9D	1	CC	27 – 45	900 – 1400		N	63	•	•	•		3%					•			cUL, CE
MDH62-54-YYYY-S9D	1	CC	36 - 54	700 - 1100		N	59.4	•	•	•		3%					•			cUL, CE

Dimension: Page 11

MDH22 : 80.4 x 36.2 x 23.1mm
MDH42 : 90.4 x 40.2 x 28.1mm
MDH62 : 149.8 x 40 x 30mm

QM Series

Plastic



Metal



- TRIAC/ELV/0-10V/PWM CV and CC mode dimming with full AC input from 110-277VAC
- Fully programmable output
- Turn on timing less than 500 ms
- UL 8750 Class 2 Class P Listed certification,
- Flickering Rate less than 10% at 120 HZ
- No load power consumption- less than 0.5 W (1W with wireless control)
- Isolation dimming circuit- Isolated from both primary and secondary circuits
- Dimming percentage less than 1%- with all 4 dimming methods
- Dual output available with 50W and 100W, pre-programmable dimming effects
- Wireless using ZigBee or Casambi – Optional
- Dry & damp location; 4-in-1 Dimming



US CASAMBI

LISTED

Model	# of Output	Output Type	Output	Output Current	Aux.	Programmable	Max. Power	Dimming Methods					Control				Case Style			Safety Approval
			(VDC)	(mA)			(Watts)	TRIAC	ELV	0-10V	PWM	Dim %	Casambi	ZigBee	DALI2	D4i	Plastic	Metal	Aluminum	
QM20-U48-yyyx-XP	1	CC	20-48	625-300		USB	20	•	•	•	•	1%	Optional	Optional			•			UL, CE
QM20-Uxx-XP	1	CV	12 or 24	1660 / 830		N/A		•	•	•	•	1%	Optional	Optional			•			
QM32-U48-yyyx-XX	1	CC	Oct-48	500 - 1050		NFC	32	•	•	•	•	1%	Optional	Optional			•			cUL, CE
QM32-U24-zz	1	CV	24	1330		N/A		•	•	•	•	1%	Optional	Optional			•			
QM40-U48-yyyx-XP	1	CC	20-48	1250-250		DIP Switch	40	•	•	•	•	1%	Optional	Optional			•			UL, CE
QM40-U24-XP	1	CV	24	1660		N/A		•	•	•	•	1%	Optional	Optional			•			
QM50-U48-yyyx-XP	1	CC	20-48	1900-250		DIP Switch	50	•	•	•	•	1%	Optional	Optional			•			UL, CE
QM50D-U48-yyyx-XP	3	CC	20-48	1250-250	•	DIP Switch		•	•	•	•	1%	Optional	Optional			•			
		20-48	1250-250	N/A		•		•	•	•	1%	Optional	Optional			•				
QM50-U24z-XP	2	CV	24	1900	•	N/A		•	•	•	•	1%	Optional	Optional			•			
		CV	12	200		•		•	•	•	1%	Optional	Optional			•				
QM100-U48-yyyx-XP	1	CC	20-48	4100-2000	•	NFC	100	•	•	•	•	1%	Optional	Optional					•	UL, CE
		CV	12	20		N/A		•	•	•	•	1%	Optional	Optional					•	
QM100D-U48-yyyx-XM	3	CC	20-48	4100-2000	•	NFC		•	•	•	•	1%	Optional	Optional					•	
		20-48	4100-2000	N/A		•		•	•	•	1%	Optional	Optional					•		
QM100-U24z-XP	2	CV	24	4100	•	N/A		•	•	•	•	1%	Optional	Optional					•	
		CV	12	200		•		•	•	•	1%	Optional	Optional					•		

Dimension: Page 11 - 13

QM20 Series: 85.3 x 37.9 x 27.7mm

QM32 Series: 224 x 31 x 16.5mm

QM40 Series : 88.6 x 41.6 x 30mm

QM50 Series : 107.5 x 43.5 x 32mm

QM70 Series : 168 x 47 x 31.5mm

QM100 Series: QM100-U48z-yyyx-LP, QM100-U24z-LP: 277.36 x 69 x 37.1mm

QM100-U48z-yyyx-BM, QM100-U24z-BM : 234.7 x 69 x 37mm

QM100-U48z-yyyx-MB, QM100-U24z-MB : 234.7 x 69 x 37mm

QM100-U48z-yyyx-SB, QM100-U24z-SB : 192 x 69 x 37mm

DA-010 Converter

For dry location



- Powered by DALI Bus voltage or external Class 2 DC source
- Output 0-10V current sink
- Convert DALI signal to 0-10V dimming signal
- IEC 62386 DALI-1 certified
- Compact size

Model	# of Output	Output Type	lutput	Input Output	Aux.	Output	Sink Current	Compatibility		Control				Case Style			Safety Approval	
			(VDC)	(mA)		(VDC)	(mA)			Dim %	Casambi	ZigBee	DALI2	D4i	Plastic	Metal		Aluminum
DA-010	1	Linear	12-22.5	2		0-10	< 2	DALI2 DT6					•		•			CE

Dimension: Page 13

DALI-010 Converter: 57 x 40 x 20.5mm



DA-020 Converter For dry location

- Powered by DALI Bus voltage or external Class 2 DC source
- DALI Type 8 Command
- Output 0-10V current sink
- Convert DALI signal to 0-10V dimming signal
- IEC 62386 DALI-1 certified
- Compact size

Model	# of Output	Output Type	Output	Input Output	Aux.	Output	Sink Current	Compatibility	Control					Case Style			Safety Approval
			(VDC)	(mA)		(VDC)	(mA)		Dim %	Casambi	ZigBee	DALI2	D4i	Plastic	Metal	Aluminum	
DA-020	1	Linear	12-22.5	2		0-10	<2	DALI2 DT8				•		•			CE

Dimension: Page 13
DALI-020 Converter: 50 x 45 x 20mm



LD Series Dry & damp location; Multipurpose

- Universal AC input range 90~305VAC
- Constant Voltage Operation
- Cooling by Free Air Convection (Metal Housing)
- Suitable for LED Strips and Moving Sign Applications
- Function options: 3 in 1 dimming (dim-to-off); DALI



Model	# of Output	Output Type	Output	Output Current	Aux.	Programmable	Max. Power	Dimming Methods					Control				Case Style			Safety Approval
			(VDC)	(mA)		Output	(Watts)	TRIAC	ELV	0-10V	PWM	Dim %	Casambi	ZigBee	DALI2	D4i	Plastic	Metal	Aluminum	
LD100H-VU83012-70(X)	1	CV	12	99.6			100			•	•	10%					•		cUL, CE	
LD100H-VU42024-70(X)	1	CV	24	100.8						•	•	10%					•		cUL, CE	
LD100H-VU28036-70(X)	1	CV	36	100.8						•	•	10%					•		cUL, CE	
LD100H-VU21048-70(X)	1	CV	48	100.8						•	•	10%					•		cUL, CE	
LD200H-VU1K612-72(X)	1	CV	12	200.4			200			•	•	10%					•		cUL, CE	
LD200H-VU83034-72(X)	1	CV	24	199.2						•	•	10%					•		cUL, CE	
LD200H-VU55036-72(X)	1	CV	36	198						•	•	10%					•		cUL, CE	
LD200H-VU41548-72(X)	1	CV	48	199.2						•	•	10%					•		cUL, CE	
LD300H-VU1K224-74(X)	1	CV	24	350			300			•	•	10%					•		cUL, CE	
LD300H-VU83336-74(X)	1	CV	36	400						•	•	10%					•		cUL, CE	
LD300H-VU62548-74(X)	1	CV	48	500						•	•	10%					•		cUL, CE	
LD400H-VU1K624-76(X)	1	CV	24	400.8			400			•	•	10%					•		cUL, CE	
LD400H-VU1K136-76(X)	1	CV	36	399.6						•	•	10%					•		cUL, CE	
LD400H-VU83348-76(X)	1	CV	48	398.4						•	•	10%					•		cUL, CE	
Dimension: Page 14 LD100H : 230 x 80.3 x 33.5mm LD200H : 230 x 80.3 x 33.5mm LD300H: 223.2 x 98 x 38.5mm LD400H : 273.2 x 98 x 38.5mm																				

EASY SETUP • SMART FEATURES BUILT FOR YOUR POWER SYSTEMS

Metal Enclosure Junction Box



REMOTE SOLUTION:

Magtech developed this metal enclosure design to support applications that require a remote LED driver solution. Engineered specifically to pair with our QM Series a 4-in-1 smart LED driver, these enclosures enhance the flexibility and expand compatibility across a wider range of lighting features and power applications.

- A separate compartment for wiring
- 3-way knock out for maximum flexibility
- An antenna knock out help extend the range of wireless signal
- A spring loaded thumb screw for easy accesses
- Available in stud-mount configuration
- Full metal design that meets the industry requirement

Compatible to;

- Q12, Q22, Q38 and Q48, Q58 Series
- M9, M18, M28, M38 and M48 Series
- MD22 and MD42 Series
- QM20, QM40 and QM50 Series
- MDH22 and MDH42 Series



Primary Junction Box



Stud Mount Junction Box



Wireless Compatible Solutions

ATOM WIRELESS IN-WALL SWITCH

Available Standard, Non-neutral and Battery Operated

- Best low power load support, no bypass part or low power light adapter required.
- Default local circuit operate and do not require system control.
- 20dBm 2.4G for long range communication.
- Power failure memory to return to its previous set level prior to the interruption of power.
- Compatible to designer style wall plates or standard off-the-shelf wall plates.
- Fit in 1-gang U.S. wall-box ; 2 1/2" minimum depth recommended.
- Non-neutral design make installation easier (ZigBee only)



Line input



Battery

WS-	Q		R		ZZ		S		Y-		X-		T	
	RELAY FOR AC ON/OFF		LOCATION		NUMBER OF BUTTONS		NEUTRAL WIRE		WIRELESS COMMUNICATION PROTOCOL		0-10V DIMMING		FACE PLATE COLOR (Optional Note 1)	
WS	T	For Yes	A	For USA: 110 – 277VAC input	04	4 Buttons	0	Yes (With) for Zigbee or Bluetooth	1	Zigbee	0	No (Only option for Battery)	A1	Dark Chocolate
			E	For Europe: 230VAC input									A2	Warm Caramel
	N	For No (Only option for Battery)	C	For USA: Battery operated	06	6 Buttons	N	No (Without), for Zigbee only	2	Bluetooth	1	Yes	A3	Moon Rock
			D	For Europe: Battery operated									08	8 Buttons
					A5	Pebble Gray								
					A6	Off-White								
					W	No face plate								


Standard or Non-neutral

Battery Operated



Color face plate

Note: AC version, face plate is not included; Battery version, face plate is included A4 Silver Gray.

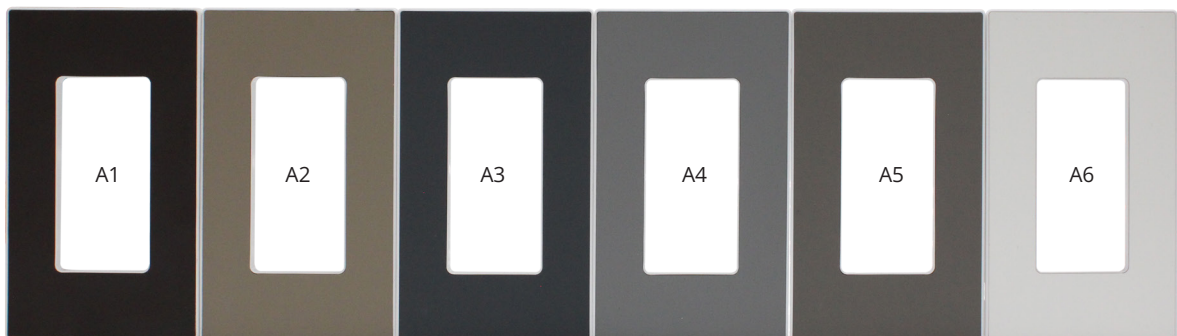

A1 Dark Chocolate

A2 Warm Caramel

A3 Moon Rock

A4 Silver Gray

A5 Pebble Gray

A6 Off-White




ZBA-T001

- Basic control node in Zigbee or BT lighting control environment.
- Provide phase cut AC source to control fixture brightness
- Built-in On/Off feature will prevent any possible leakage
- Input 110VAC to 277VAC
- Dimming Control: Leading-Edge, Trailing-Edge, Selectable.

Dimension: Page 15

MODEL	NO. OF OUTPUT	OUTPUT	MAX. POWER	DIMMING METHODS				CASE STYLE			UL Class
		(VDC)	(WATTS)	TRIAC	ELV	0-10V	PWM	PLASTIC	METAL	ALUMINUM	
ZBA-T001-R	1	110-277		•	•	•	•	•			
ZBA-T001-F	1	110-277		•	•	•	•	•			
ZBA-T001-RB	1	110-277		•	•	•	•	•			
ZBA-T001-FB	1	110-277		•	•	•	•	•			

FIND THE PERFECT LED DRIVERS AND CONTROL FOR YOUR PROJECT

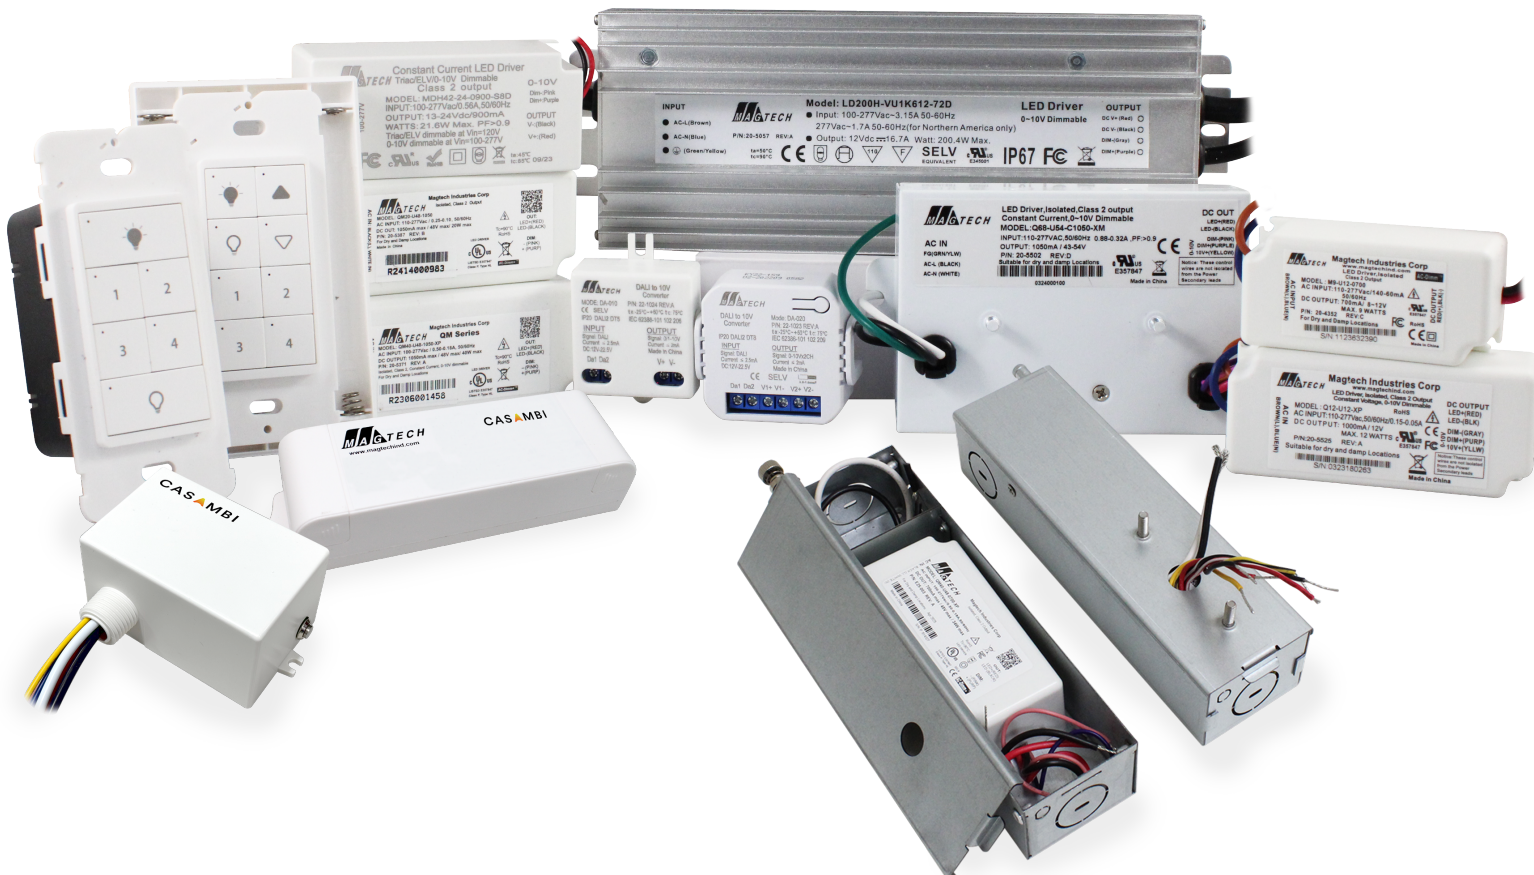


Product Dimensions

LD Series (L x W x H) Units: IN [mm]


Q12-XM, Q22-XM: 121 x 42 x 29mm

"XM" – Stud-mountable Metal Case Enclosure

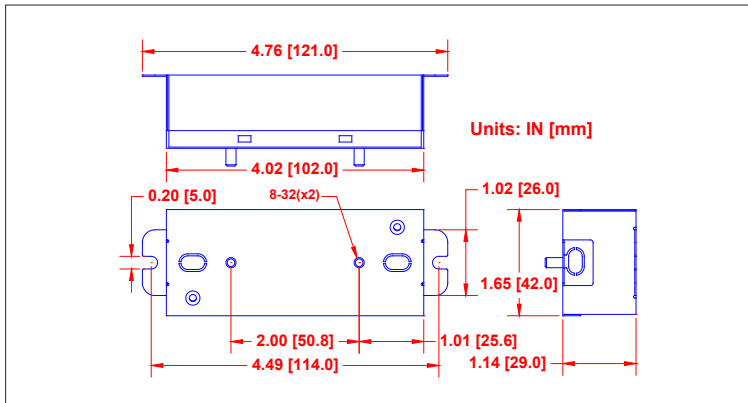


Q12-XP, Q22-XP: 85.3 x 37.9 x 27.7mm

"XP" – Plastic Case Enclosure

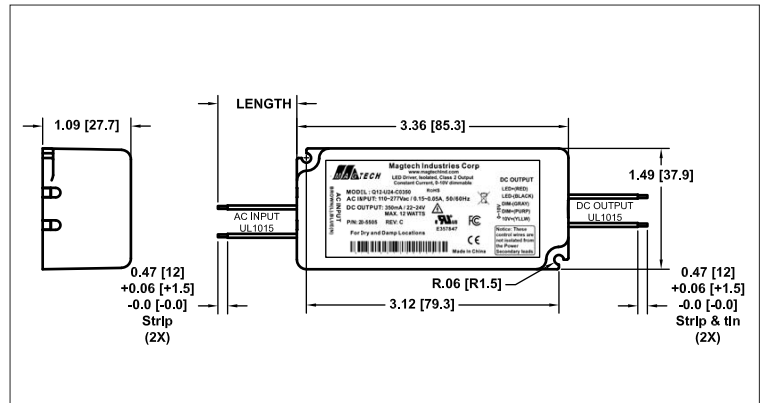


Q38-XM, Q48-XM, Q58-XM,
Q68-XM: 138 x 47 x 32mm

"XM" – Stud-mountable Metal Case Enclosure

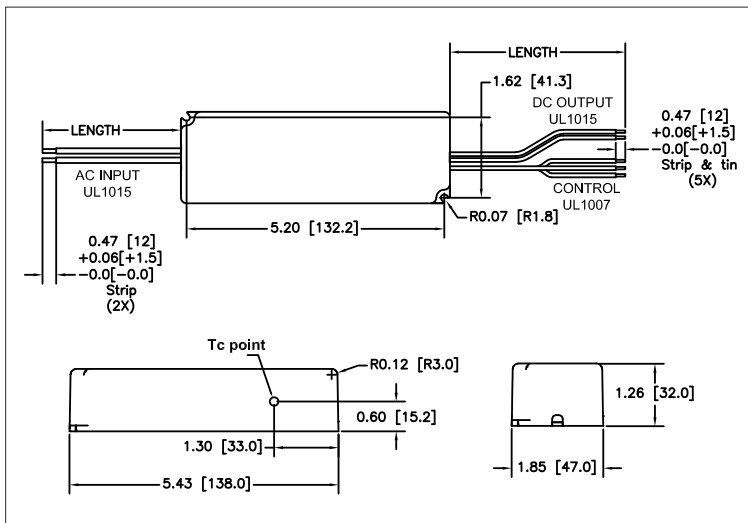


Q38-XP, Q48-XP, Q58-XP,
Q68-XP: 127.3 x 30 x 76.3mm

"XP" – Plastic Case Enclosure

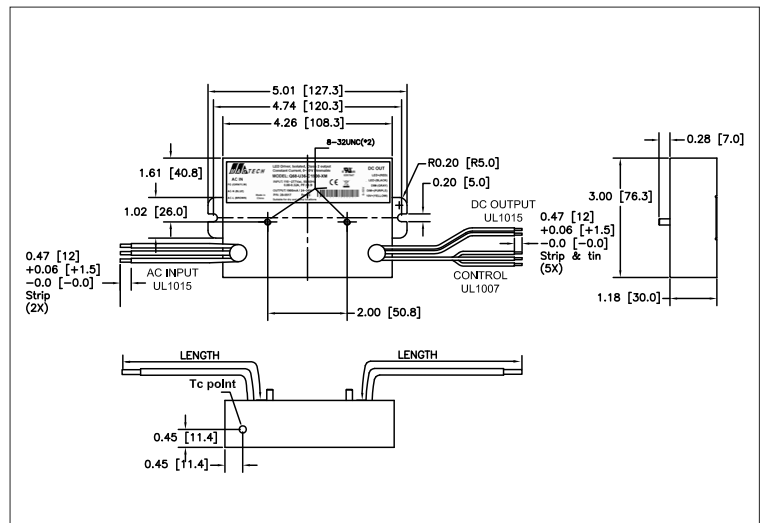


M Series Dimension (L x W x H) Units: IN [mm]


M9 Series : 2.78" x 1.36" x 0.98"

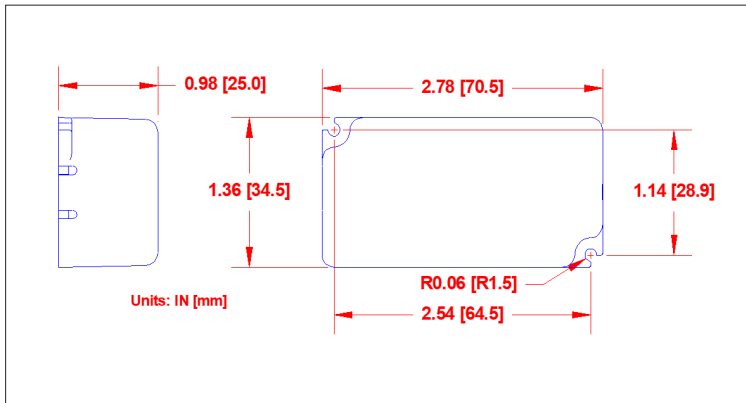


M18 Series : 3.36" x 1.50" x 1.09"

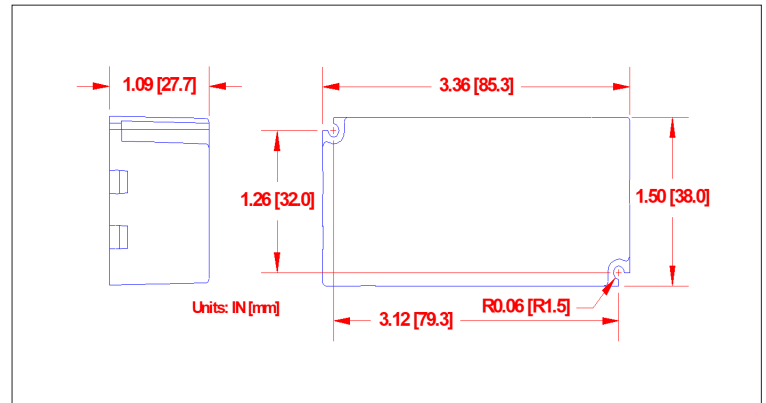


M28-XM & M38-XM Series : 4.76" x 1.65" x 1.14"

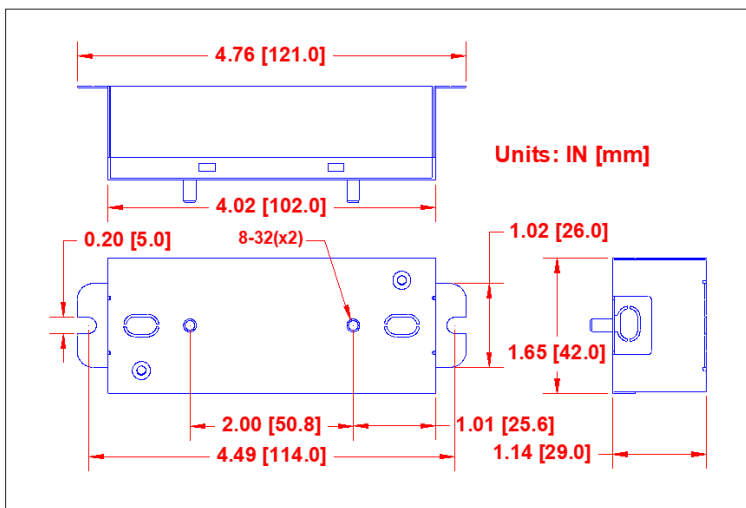

M28-XP & M38-XP Series : 3.36" x 1.61" x 1.18"

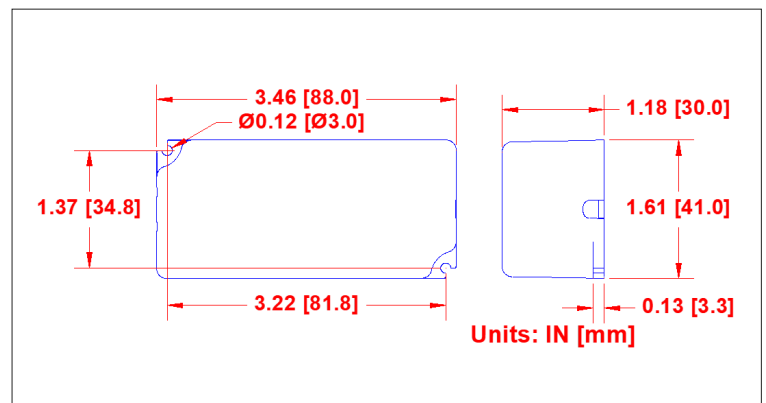


M48-XP Series : 5.43" x 1.85" x 1.26"

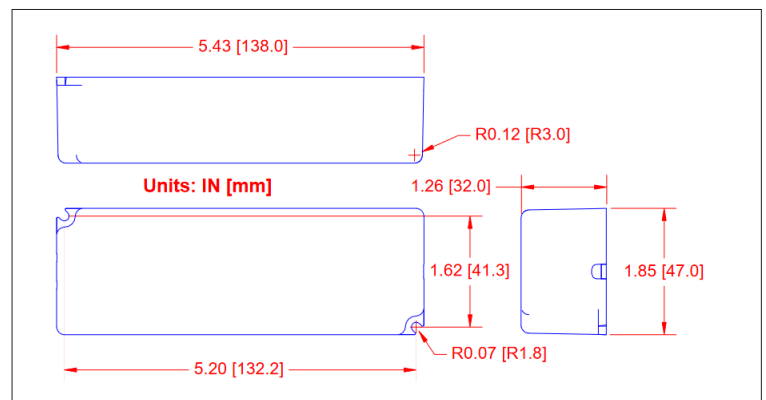

MD Series Dimension (L x W x H) Units: IN [mm]


MD22-XM Series: 121 x 1.65 x 29mm

"XM" – Stud-mountable Metal Case / Class P Certified

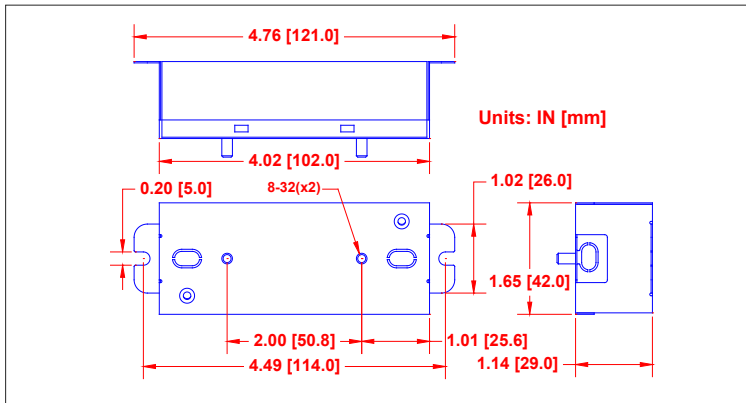


MD22-XM Series: 85.3 x 37.9 x 27.7mm

"XP" – Plastic Case / TL Mark Certified

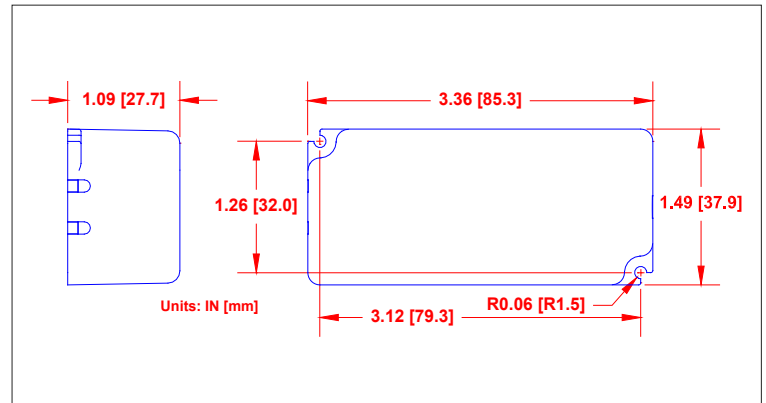


MD42-XM Series: 114 x 42 x 29mm

"XM" – Stud-mountable Metal Case / Class P Certified

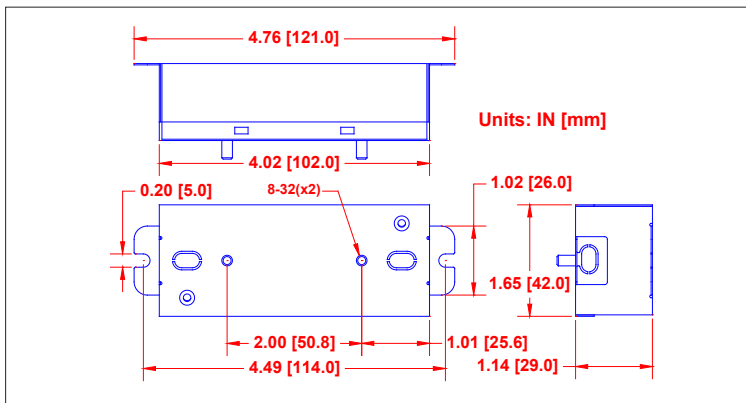


MD42-XM Series: 88 x 41 x 34.8mm

"XP" – Plastic Case / TL Mark Certified

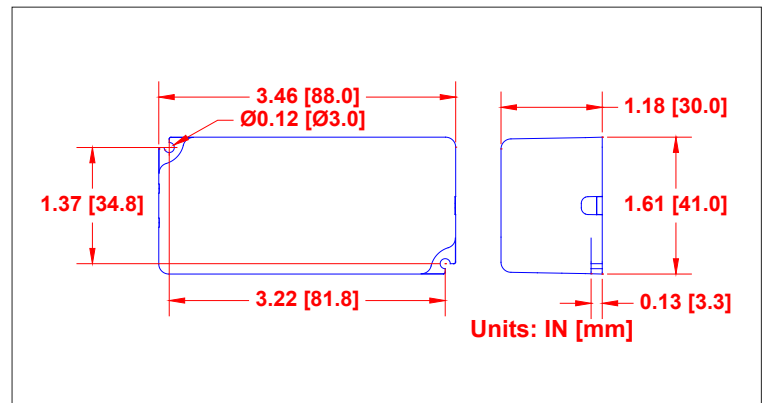


MDH Series Dimension (L x W x H) Units: IN [mm]


MDH22 : 80.4 x 36.2 x 23.1mm

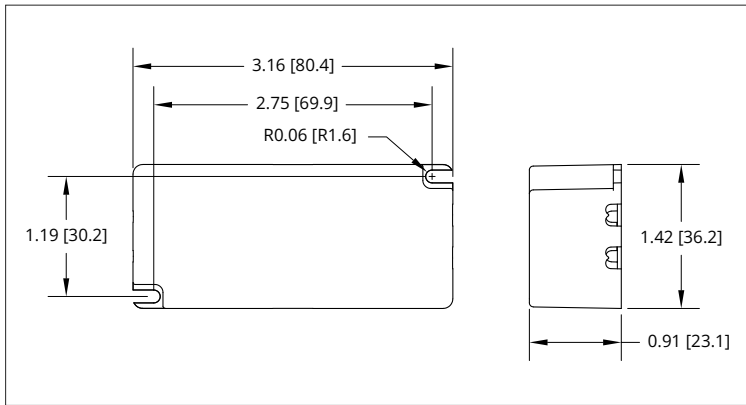

MDH42 : 90.4 x 40.2 x 28.1mm

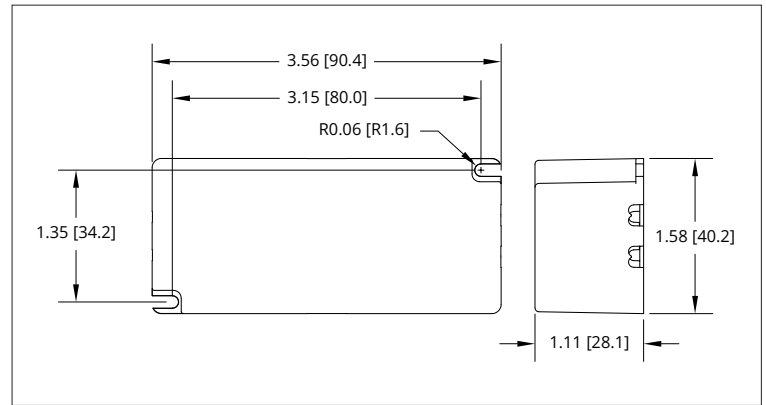


MDH62 : 149.8 x 40 x 30mm

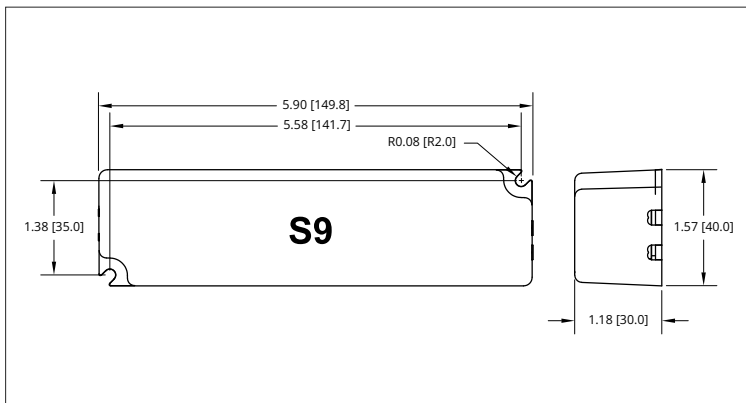


QM Series Dimension (L x W x H) Units: IN [mm]


QM20 Series: 85.3 x 37.9 x 27.7mm

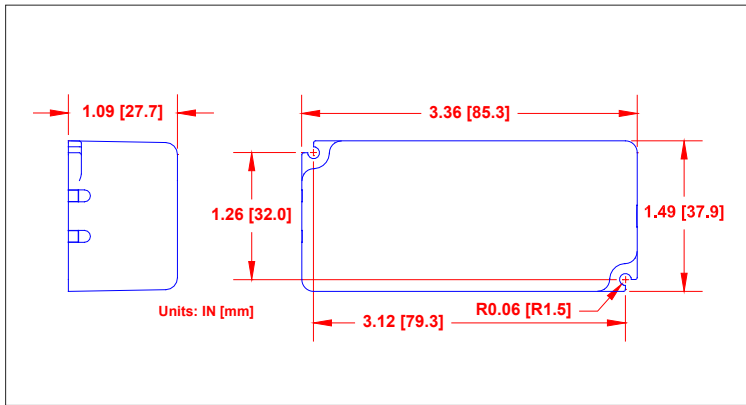


QM32 Series: 224 x 31 x 16.5mm

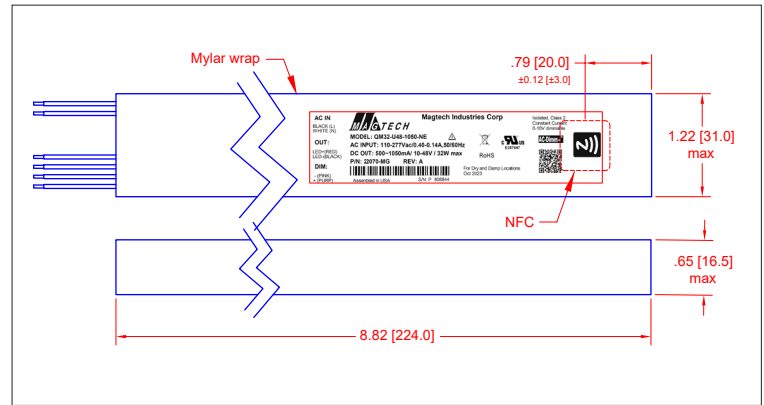


QM40 Series : 88.6 x 41.6 x 30mm

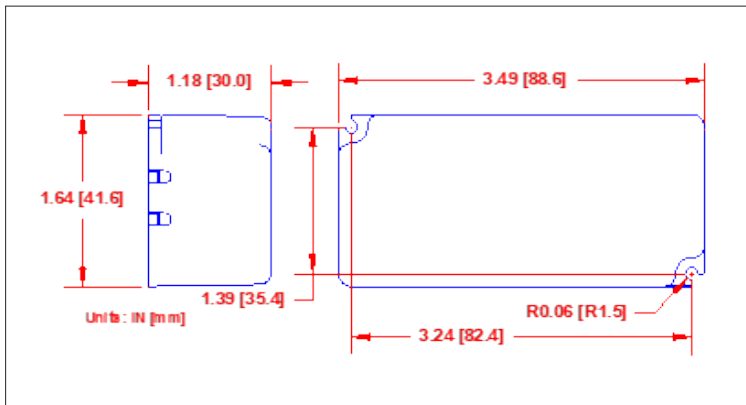


QM50 Series : 107.5 x 43.5 x 32mm

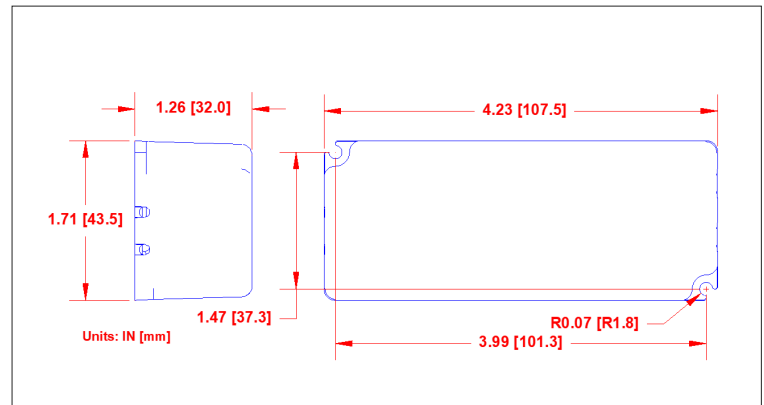

QM100 Series: QM100-U48z-yyyy-LP, QM100-U24z-LP
277.36 x 69 x 37.1mm

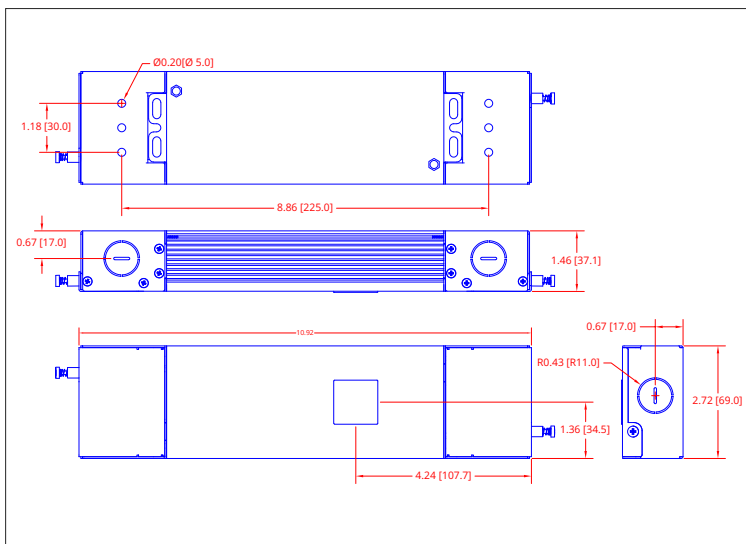



QM100-U48z-yyyy-BM , QM100-U24z-BM
234.7 x 69 x 37mm

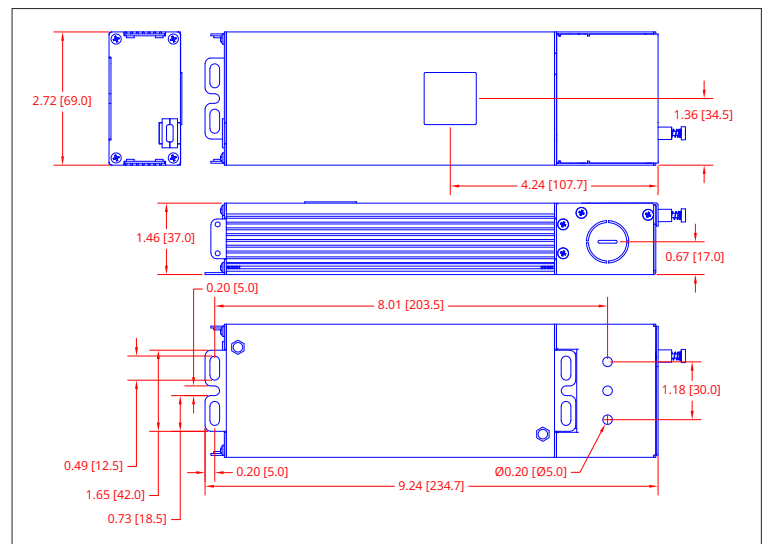

QM100 Series Dimension (L x W x H) Units: IN [mm]

QM100-U48z-yyyy-MB, QM100-U24z-MB
234.7 x 69 x 37mm


QM100-U48z-yyyy-SB, QM100-U24z-SB
192 x 69 x 37mm

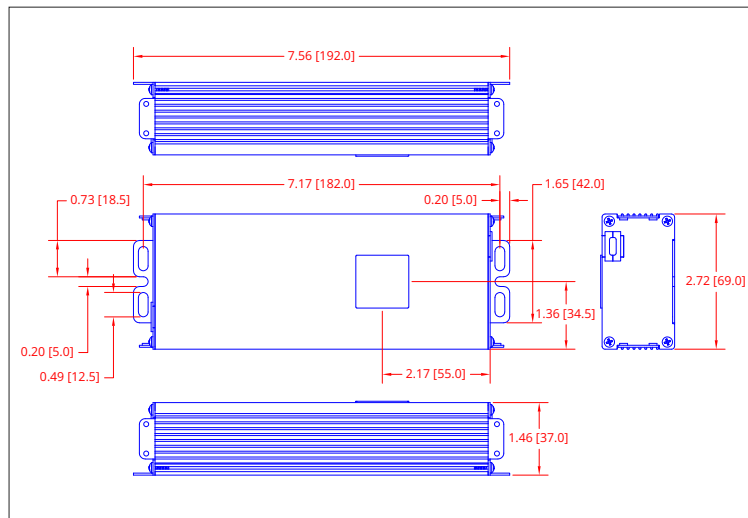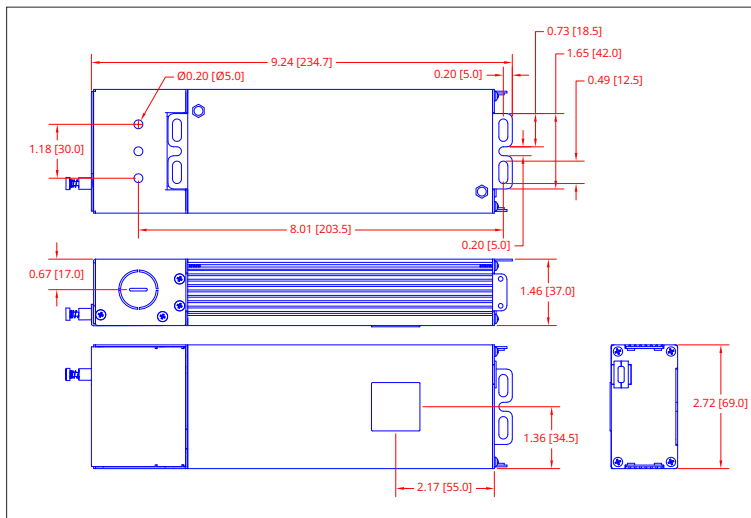

DALI Converter Dimension (L x W x H) Units: IN [mm]


DALI-010 Converter: 57 x 40 x 20.5mm

DALI-020 Converter 50 x 45 x 20mm

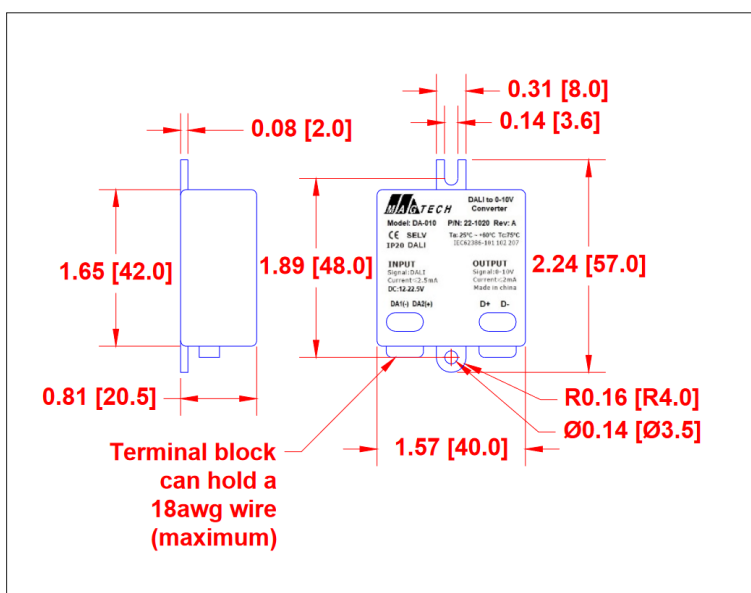


LD Series Dimension (L x W x H) Units: IN [mm]


LD100H : 230 x 80.3 x 33.5mm

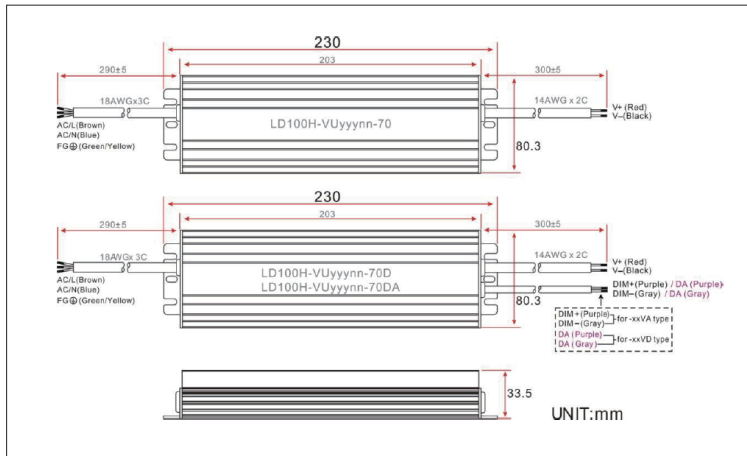


LD200H : 230 x 80.3 x 33.5mm

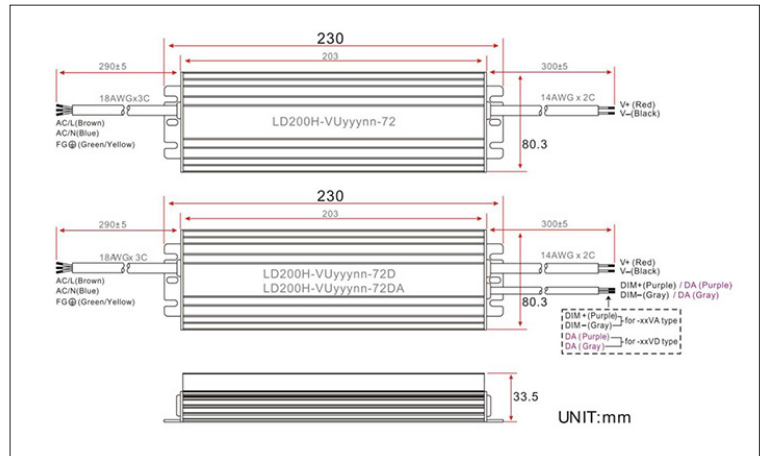

LD300H: 223.2 x 98 x 38.5mm

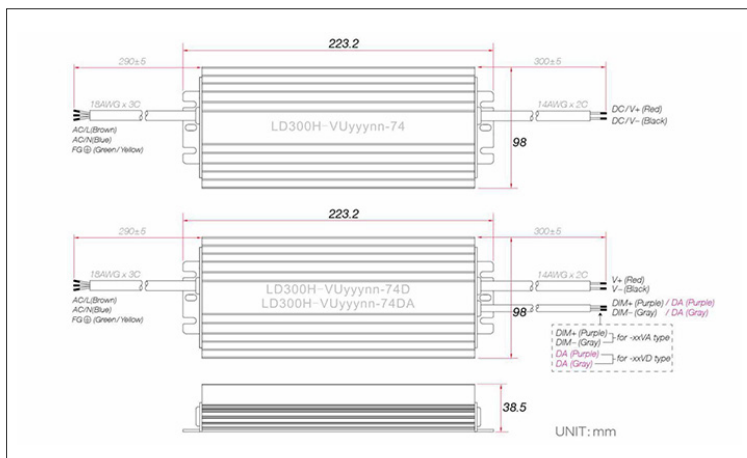


LD400H : 273.2 x 98 x 38.5mm


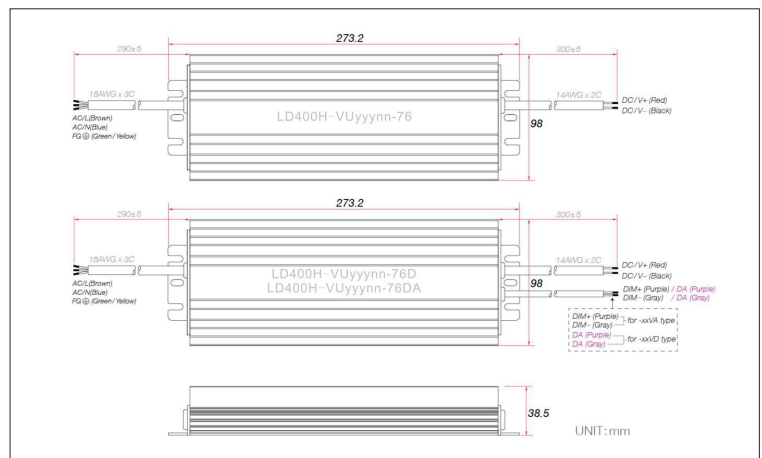


Metal Enclosure Junction Box Dimension

Primary Junction Box

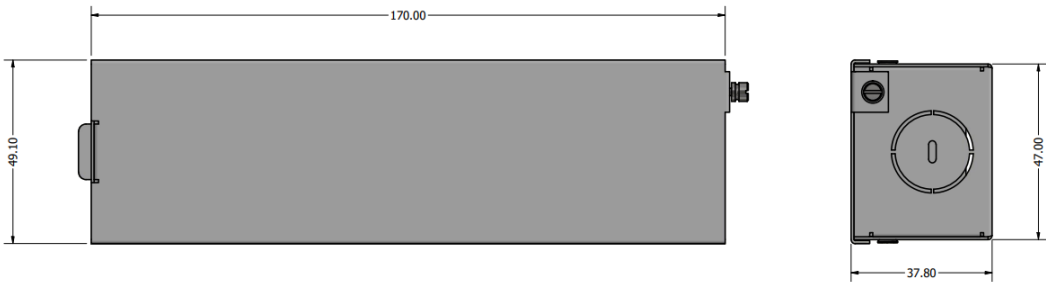


Stud-Mount Junction Box

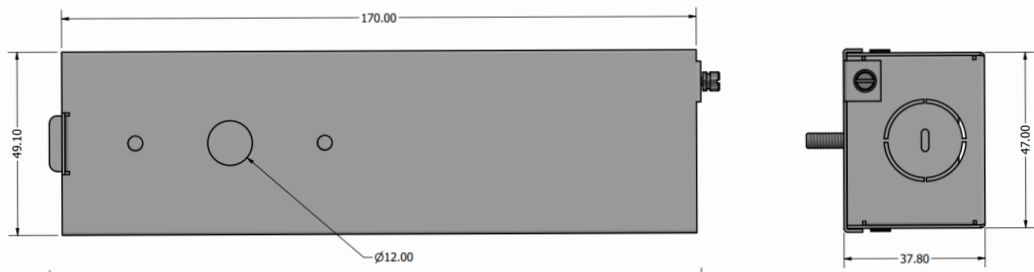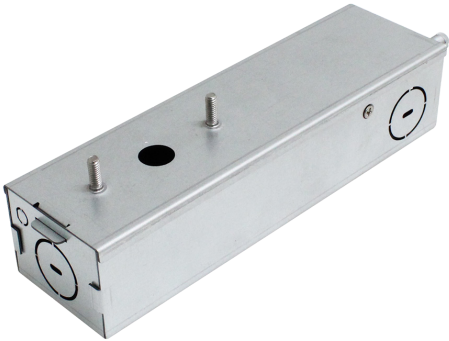


Atom Wall Switch Dimension (L x W x H) Units: IN [mm]


Standard or Non-neutral

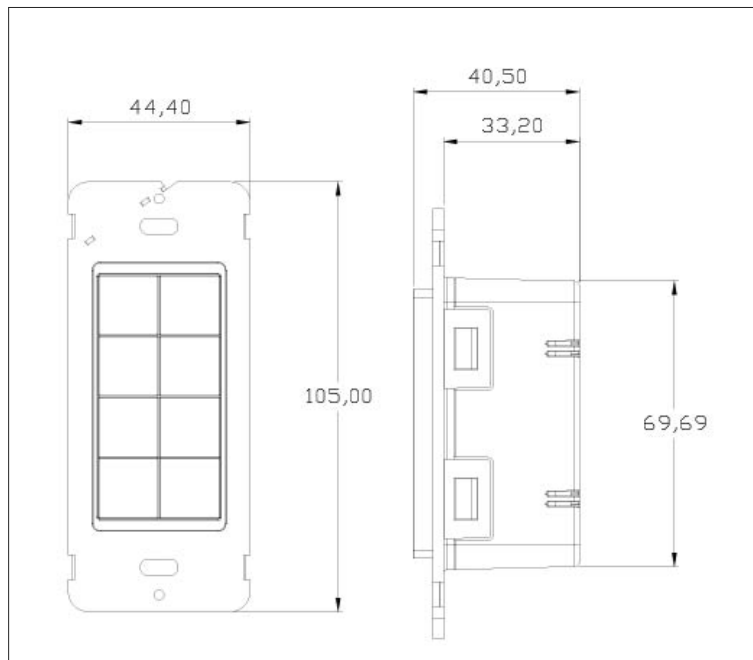


Battery Version

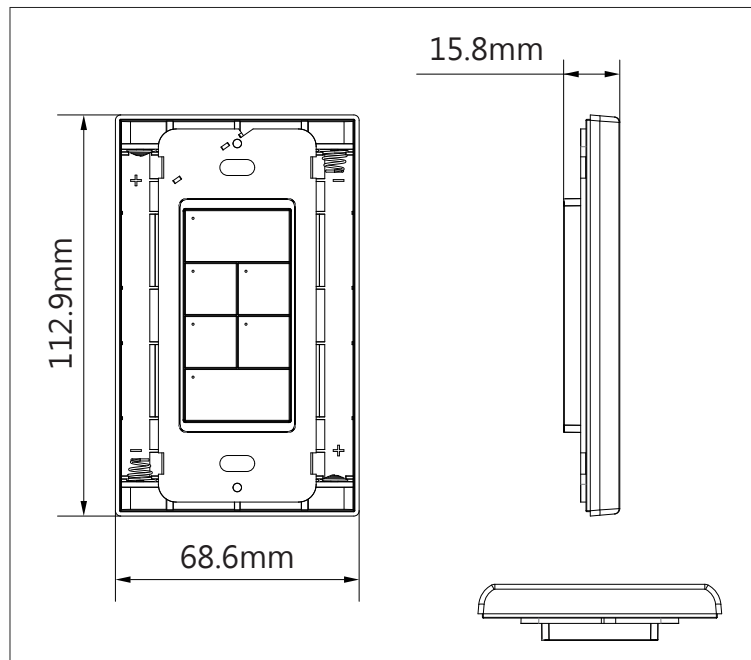

Color Face Plate

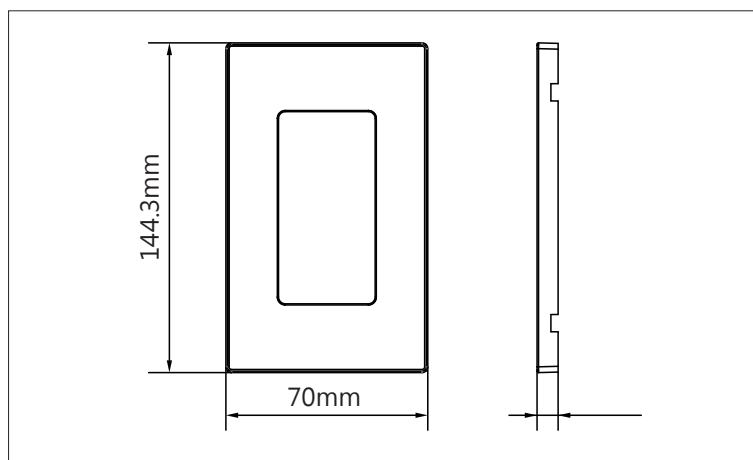

ZBA-T001 : 131.5 x 39 x 29mm

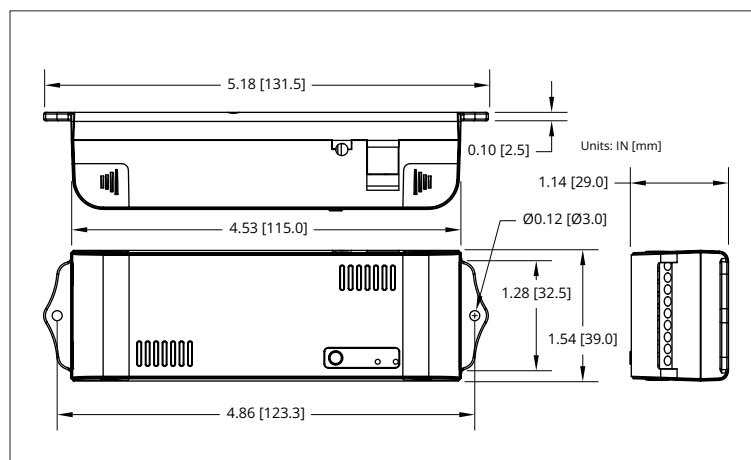



For over **37 years** we have taken pride in our great relationships with our customers by providing them with quality services, LED driver products and Wireless Lighting Solutions.

We look forward to being your next lighting partner.

More information visit our website.

www.magtechind.com

Office: (702) 364 - 9998

Fax: (702) 364 - 1562

Email: csupport@magtechind.com | sales@magtechind.com

Address: 5625-A Arville ST. Las Vegas, NV 89118

Monday - Friday | 8AM - 5PM