

EX-800 Series

LED Exit Sign
Egress Lighting and Wireless Egress Lighting

PRODUCT FEATURE

HOUSING

- Injection-molded thermoplastic ABS housing.
- Plastic enclosure with 5VA flame retardant.
- Replaceable directional chevron insert are easily remove and reinsert
- Red or green letter with 6 " height and 3/4" stroke.
- Single and double face configuration.
- LynxEM® Wireless Testing and Reporting System

ELECTRICAL

- 120/277VAC Dual voltage operation
- 220-240VAC model optional
- Test switch and charge rate indicator
- Long-life maintenance free, rechargeable Ni-cad battery
- 24 hours recharge after 90 minutes discharge

LISTING

- Suitable for use in 10°C - 40°C ambient temperature, suitable for damp location
- UL and CSA listed according standard UL924 and CSA C22 2 NO 141-10
- Meets or exceed all requirement in NFPA 70, NFPA 101 life safety code
- Compliant CEC title 20 efficiency regulations

ILLUMINATION

- 6 red or green LED mount on LED PCBA
- Unit provide not less than 8.6cd/mm² on AC and DC mode

MOUNTING

- Suitable for wall mounting, ceiling mounting and side mounting
- Housing snaps to canopy with simple twist and locking tightly secure housing to canopy



RELATED PRODUCTS

[S1 Series Exit Sign](#)

[S2 Series Exit Sign](#)

[S3 Series Exit Sign](#)

[CB-810 Exit Combo](#)

WARRANTY

- See [Limited Warranty Policy](#) for more additional information

ORDER INFORMATION:

MODEL	CIRCUIT		LETTER COLOR		DISCHARGE DURATION		TEST FACILITY		HOUSING COLOR		VOLTAGE
EX	800	Battery backup	RX	Red	BLANK	Manual test	BLANK	Manual test	W	White	1 120/277V
	810T	Dual circuit – AC/AC	GX	Green	3H	3 hours (Only for GX manual test)	CT	Self-testing/ Self-diagnostics	B	Black	3 220-240V (Green color)

For AC-only, not UL certified. Please refer to this application notes. [Click here.](#)

Project Name:	
Type:	

EX-800 Series


LED Exit Sign
Egress Lighting and Wireless Egress Lighting

MODEL LIST

MODEL NO	FACE / COLOR	TEST FACILITY	NI-CAD BATTERY	RECHARGE TIME	EMERGENCY RUN TIME	OUTPUT RATING			EMERGENCY OUTPUT		
						VAC/HZ	A	W	INTEGRAL	LUMEN OUTPUT	REMOTE CAPABILITY
EX-800RX	Universal red color	Manual test	2.4V 300mAh	24 hours	90 minutes	120/277 60Hz	0.027 0.012	2.5	6 red LEDs	N/A	N/A
EX-800GX	Universal green color	Manual test	3.6V 300mAh	24 hours	90 minutes	120/277 60Hz	0.029 0.013	2.9	6 green LEDs	N/A	N/A
EX-800RX-CT	Universal red color	Self-testing	3.6V 300mAh	24 hours	90 minutes	120/277 60Hz	0.037 0.018	4.4	6 red LEDs	N/A	N/A
EX-800GX-CT	Universal green color	Self-testing	3.6V 300mAh	24 hours	90 minutes	120/277 60Hz	0.037 0.017	4.4	6 green LEDs	N/A	N/A
EX-810TRX	Universal red color	N/A	N/A	N/A	N/A	120/277 60Hz	0.021 0.010	2.0	6 red LEDs	N/A	N/A
EX-810TGX	Universal green color	N/A	N/A	N/A	N/A	120/277 60Hz	0.019 0.009	1.9	6 green LEDs	N/A	N/A
EX-810RX	Universal red color	N/A	N/A	N/A	N/A	120/277 60Hz	0.023	2.5	6 red LEDs	N/A	N/A
EX-810GX	Universal green color	N/A	N/A	N/A	N/A	120/277 60Hz	0.024	2.7	6 green LEDs	N/A	N/A
EX-800GX-3	Universal green color	Manual test	3.6V 300mAh	24 hours	90 minutes	220/240 50Hz	0.021	3.2	6 green LEDs	N/A	N/A
EX-800GX	Universal green color	Manual test	3.6V 600mAh	24 hours	90 minutes	220/240 60Hz	0.015	3.3	6 green LEDs	N/A	N/A
EX-800RX-3	Universal red color	Manual test	3.6V 300mAh	24 hours	90 minutes	220/240 50Hz	0.023	3.2	6 red LEDs	N/A	N/A

PRODUCT DIMENSION

Q'TY : 12 PCS
N.W : 12.5 KGS
G.W : 14.5 KGS
MEA'S : 1.84 CUFT

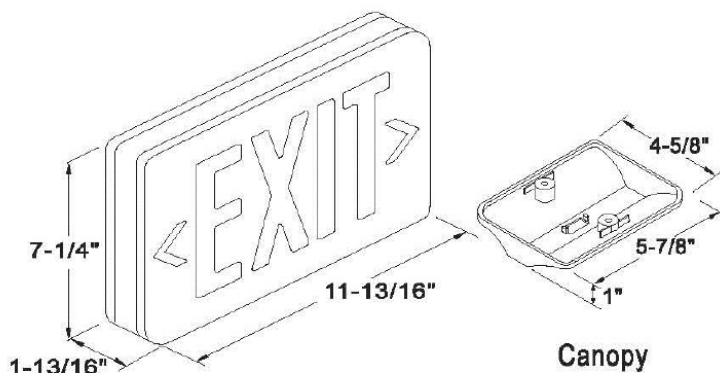

NOTE:

Universal package contained assembled 2 exit panel and one back plate for backup

