

# ZBS-E001

Wireless Wall-mount Scene Controller

Project Name:	
Type:	




ZBS-E001 is the first of a kind to have wireless scene control along with dimming function. It fits in existing wall switch wiring box to make installation easy. It works seamlessly with ZGW-C01 and ZGW-A01 or any other Zigbee Gateways that are Zigbee H.A 1.2 compatible.

## WARRANTY

- See [Limited Warranty Policy](#) for more additional information.

## SPECIFICATIONS

<b>COMPATIBILITY :</b>	Zigbee H.A 1.2
<b>INPUT :</b>	110 – 277VAC/ 50 – 60Hz
<b>OPERATING ENVIRONMENT :</b>	-20 to +65°C
<b>RADIO PROPERTIES :</b>	2.4GHz, +19.5DbM Transmit Power
<b>INTERNAL ANTENNA :</b>	Built-in
<b>LED INDICATORS</b>	Solid (In-Network) Flashing (Pairing Mode)
<b>CONTROL :</b>	4 Scene Control button 2 Button Short press for On/ Off; Long Press for dimming up and down
<b>DIMENSIONS :</b>	120 x 72 x 36mm (L x W x H)
<b>WARRANTY :</b>	5 Year

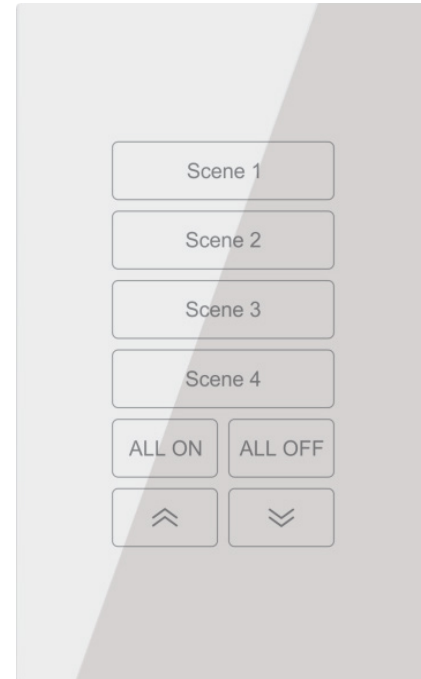

## PRODUCT FEATURES

- Zigbee H.A 1.2 compatible; control lighting fixtures wirelessly
- Unique 6 button touch panel with LED back-lite
- Fit standard wall switch junction box.
- 100VAC - 264VAC full range input for non-worry installation.
- High interoperability in compliant to global Zigbee standards.
- Start of the art algorithms providing seamless smooth dimming effect
- Easy commissioning, easy to use and easy to control
- Standard Zigbee OTA makes updating easy and current.